



TRACK WIDTH (in.)	TRACK SERIES	PRODUCT FAMILY	PART NUMBER	OEM PART NUMBER	TREAD				GUIDE/DRIVE LUGS		CARCASS		
					Qty	Height (in.)	Tip width (in.)	Pitch (in.)	Qty	Length (in.)	Piles	Main cable size (mm)	Thickness (mm)
MT700	14	6500	General AG	E14AR02908	46	3.0	2.5	7.8	46	5.5	4	6.7	44
		6500	General AG	E14AR02909	46	3.0	2.5	7.8	46	5.5	4	6.7	44
	16	6500	General AG	E16AR02919	46	3.0	2.5	7.8	46	5.5	4	6.7	44
		6500	General AG	E16AR02920	46	3.0	2.5	7.8	46	5.5	4	6.7	44
		4500	General AG	F16AR02921	46	2.7	1.6	7.8	46	4.7	4	5.4	37
		4500	General AG	F16AR02922	46	2.7	1.6	7.8	46	4.7	4	5.4	37
	18	6500	General AG	E18AR01923	92	3.0	2.5	7.8	46	5.5	4	6.7	44
		6500	High roading	E18AR02924	46	3.0	2.5	7.8	46	5.5	4	6.7	44
		6500	High roading	E18AR02925	46	3.0	2.5	7.8	46	5.5	4	6.7	44
		4500	General AG	F18AR02926	92	2.7	1.6	7.8	46	4.7	4	5.4	37
		4500	Low ground disturbance	F18AR02927	130	1.5	2.8	5.5	46	4.7	4	5.4	37
	24	4500	General AG	F24AR02868	92	2.7	1.6	7.8	46	4.7	4	5.4	37
	25	6500	General AG	E25AR02989	92	2.7	1.6	7.8	46	5.5	4	5.4	42
		6500	High roading	E25AR02990	92	3.0	2.5	7.8	46	5.5	4	5.4	42
		4500	General AG	F25AR02928	92	2.7	1.6	7.8	46	5.5	4	5.4	37
		4500	General AG	F25AR02991	92	2.7	1.6	7.8	46	4.7	4	5.4	37
		4500	Low ground disturbance	F25AR02992	130	1.6	2.8	5.5	46	4.7	4	5.4	37
	30	6500	General AG	E30AR02993	92	2.7	1.6	7.8	46	5.5	4	5.4	42
		6500	High roading	E30AR02994	92	3.0	2.5	7.8	46	5.5	4	5.4	42
		4500	General AG	F30AR02929	92	2.7	1.6	7.8	46	5.5	4	5.4	37
MT800		4500	General AG	F30AR02995	92	2.7	1.6	7.8	46	4.7	4	5.4	37
	18	6500	General AG	E18AS02930	100	3.0	2.5	8.0	52	5.5	4	6.7	44
	27.5	6500	General AG	E27AS02996	100	2.7	1.6	8.0	52	5.5	4	5.4	42
		6500	High roading	E27AS02997	100	3.0	2.5	8.0	52	5.5	4	5.4	42
		4500	General AG	F27AS02931	100	2.7	1.6	8.0	52	5.5	4	5.4	37
		4500	General AG	F27AS02998	100	2.7	1.6	8.0	52	4.7	4	5.4	37
	30	6500	Scraper	E30AS02932	100	2.2	2.8	8.0	52	5.5	4	6.7	44
		6500	General AG	E30AS02999	100	2.7	1.6	8.0	52	5.5	4	5.4	42
		6500	High roading	E30AS03000	100	3.0	2.5	8.0	52	5.5	4	5.4	42
		4500	General AG	F30AS02933	100	2.7	1.6	8.0	52	5.5	4	5.4	37
		4500	General AG	F30AS03001	100	2.7	1.6	8.0	52	4.7	4	5.4	37
	36	6500	High roading	E36AS03002	100	3.0	2.5	8.0	52	5.5	4	5.4	42
		6500	Scraper	E36AS02934	100	2.2	2.8	8.0	52	5.5	4	6.7	44
		4500	General AG	F36AS03003	100	2.7	1.6	8.0	52	4.7	4	5.4	37

AGRICULTURAL TRACK



AGCO



Camso is the best of Camoplast and Solideal.
To keep moving forward while staying true to our history,
we're now the Road Free company.

camso.co



FORMERLY
CAMOPLAST
SOLIDEAL



CAMOPLAST DURABUILT
TRACKS ARE BECOMING
CAMSO TRACKS

Printed in Canada.

1507_Camso_AgBrochureTracks_2015_AGCO




GENERAL AG APPLICATIONS

Built to provide an excellent combination of traction and comfort with minimal soil disturbance

SPECIALTY APPLICATIONS

Available for selected models/series

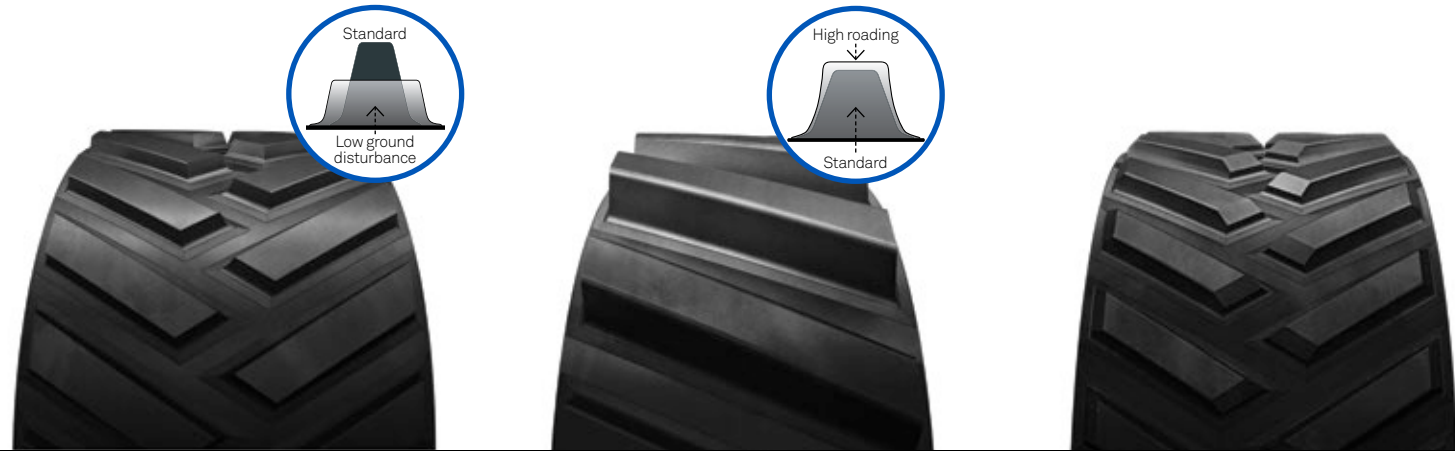

LOW GROUND DISTURBANCE

Optimized for maximum weight distribution for minimal soil disturbance or berming

Shallow and wide tip width treadbar

- Low profile tight pitch
- Provides 40% more treadbar than standard tracks
- Contact patch is over 100% larger than an equivalent standard track

Traction
Less Compaction
Roding Ability



HIGH ROADING

Optimized tread life, ride quality and control for roading operation or high pulling on hard ground

Diagonal tread pattern and chevron tapered wide tip width treadbar

- Added tread volume
- Increases carcass stiffness
- Provides up to 10% more surface area

Traction
Less Compaction
Roding Ability



SCRAPER

Built to withstand the toughest commercial or agricultural scraper conditions with maximum service life

Trackshield™: 45% increased puncture and wear resistance (over 5500)

6.7 mm cable: 24% increased tear resistance (over 5.4 mm)

GUIDE LUGS

Maximizes guiding surface

- Optimized lug geometry

AVAILABLE ON

4500 Increases side load performance
6500 Operating in side hill application greatly increases lug life

EXCLUSIVE ENDLESS SINGLE CURE TECHNOLOGY

Ensures uniform tension throughout the track

- Consistent cable position to minimize internal stress
- Specific rubber positioned consistently at targeted areas
- No carcass distortion

TREAD BAR

Provides perfect balance between traction, cleanout and minimized ground disturbance
Optimized for even tread wear and reduced vibration generating an unmatched ride quality

- Chevron tapered and diagonal treadbar design


TRACKSHIELD™ CARCASS

Increases the life of your track

- Provides a wear and puncture-resistant carcass

AVAILABLE ON

4500 + 20% improvement (over 3500)
6500 + 45% improvement (over 5500)




INDUSTRY-LEADING MAIN CABLE

Resists high tensions

- The biggest and strongest cables on the market

AVAILABLE ON

6500 6.7 mm cable: 24% increase in tear resistance (over 5.4 mm)



RUBBER COMPOUNDS

Improves resistance to cutting, gouging and tearing

Slows rubber wearing, aging and cracking

- Combination of up to 6 specific compounds (treads, carcass, guide lugs)

The Camso 4500 and 6500 are available on AGCO tractors.




TRACK WIDTH (in.)	TRACK SERIES		PRODUCT FAMILY	PART NUMBER	OEM PART NUMBER	TREAD				GUIDE/DRIVE LUGS		CARCASS		
						Qty	Heigth (in.)	Tip width (in.)	Pitch (in.)	Qty	Length (in.)	Plies	Main cable size (mm)	Thickness (mm)
STX	30	6500	General AG	E30BE02858	N/A	84	2.0	1.7	6.0	42	3.6	3	5.4	35
		6500	Scraper	E30BE02837	N/A	84	1.6	2.4	6.0	42	3.6	3	5.4	35
		3500	General AG	634-3023	84182440	84	2.0	1.7	6.0	42	3.6	3	5.4	35
	36	6500	General AG	E36BE02857	N/A	84	2.0	1.7	6.0	42	3.6	3	5.4	35
		3500	General AG	634-3616	84341575	84	2.0	1.7	6.0	42	3.6	3	5.4	35
9300	30	6500	General AG	E30BD02855	N/A	78	2.0	1.7	6.0	39	3.6	3	5.4	35
		6500	Scraper	E30BD02856	N/A	78	1.6	2.4	6.0	39	3.6	3	5.4	35
		3500	General AG	634-3026	84341573	78	2.0	1.7	6.0	39	3.6	3	5.4	35
	36	3500	General AG	634-3638	N/A	78	2.0	1.7	6.0	39	3.6	3	5.4	35
Rowtrac	16	3500	General AG	B16BG03087	47539606	88	1.6	2.4	6.0	44	4.2	3	5.4	35
	18	3500	General AG	B18BG03088	47539608	88	1.6	2.4	6.0	44	4.2	3	5.4	35
	24	3500	General AG	B24BG03089	47539613	88	1.6	2.4	6.0	44	4.2	3	5.4	35
	30	3500	General AG	B30BG03090	47539614	88	1.6	2.4	6.0	44	4.2	3	5.4	35

AGRICULTURAL TRACK



1507_Camso_AgBrochureTracks_2015_CASE
Printed in Canada.

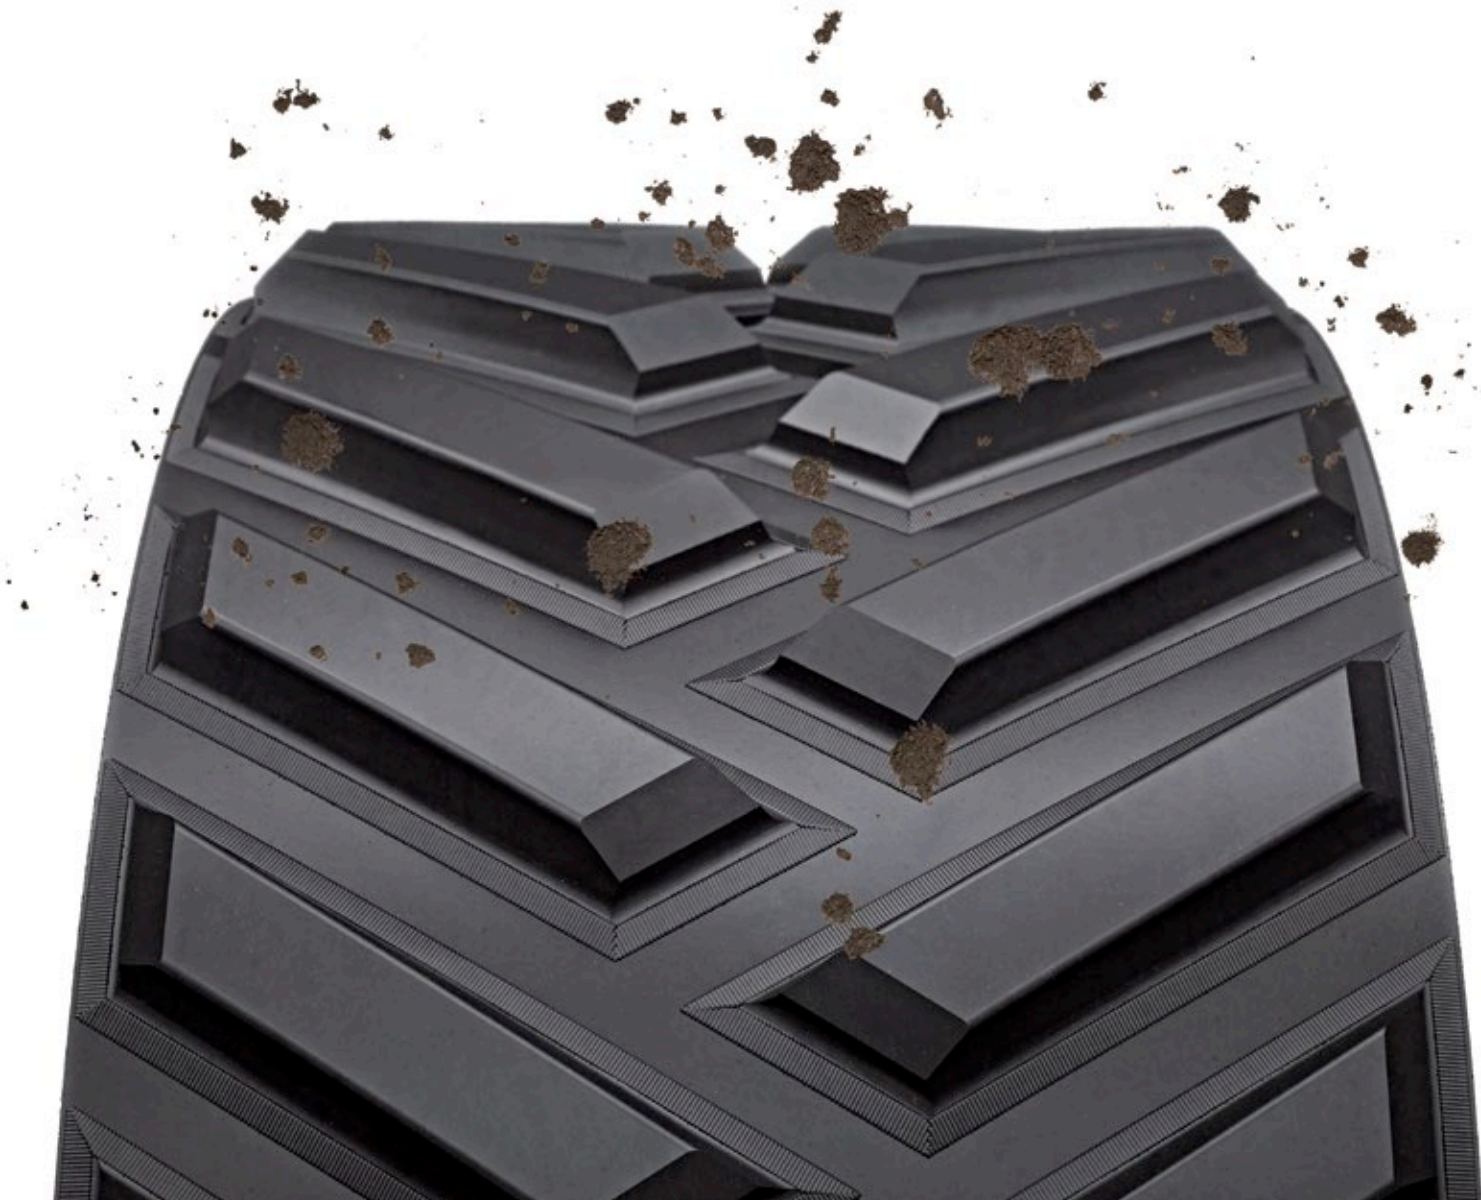

Camso is the best of Camoplast and Solideal.
To keep moving forward while staying true to our history,
we're now the Road Free company.

camso.co



FORMERLY
CAMOPLAST
SOLIDEAL



CAMOPLAST DURABUILT
TRACKS ARE BECOMING
CAMSO TRACKS

APPLICATIONS



GENERAL AG APPLICATIONS

BUILT TO PROVIDE AN EXCELLENT COMBINATION OF TRACTION AND COMFORT WITH MINIMAL SOIL DISTURBANCE

SPECIALTY APPLICATIONS

Available for selected models/series


SCRAPER

Built to withstand the toughest commercial or agricultural scraper conditions with maximum service life

Duradrive internal fabric reinforcement design exclusively on 6500 positive drive tracks

- Reduces chunking and tearing
- Doubles load-carrying capacity


The Camso 3500 and 6500 are available on Case IH tractors.

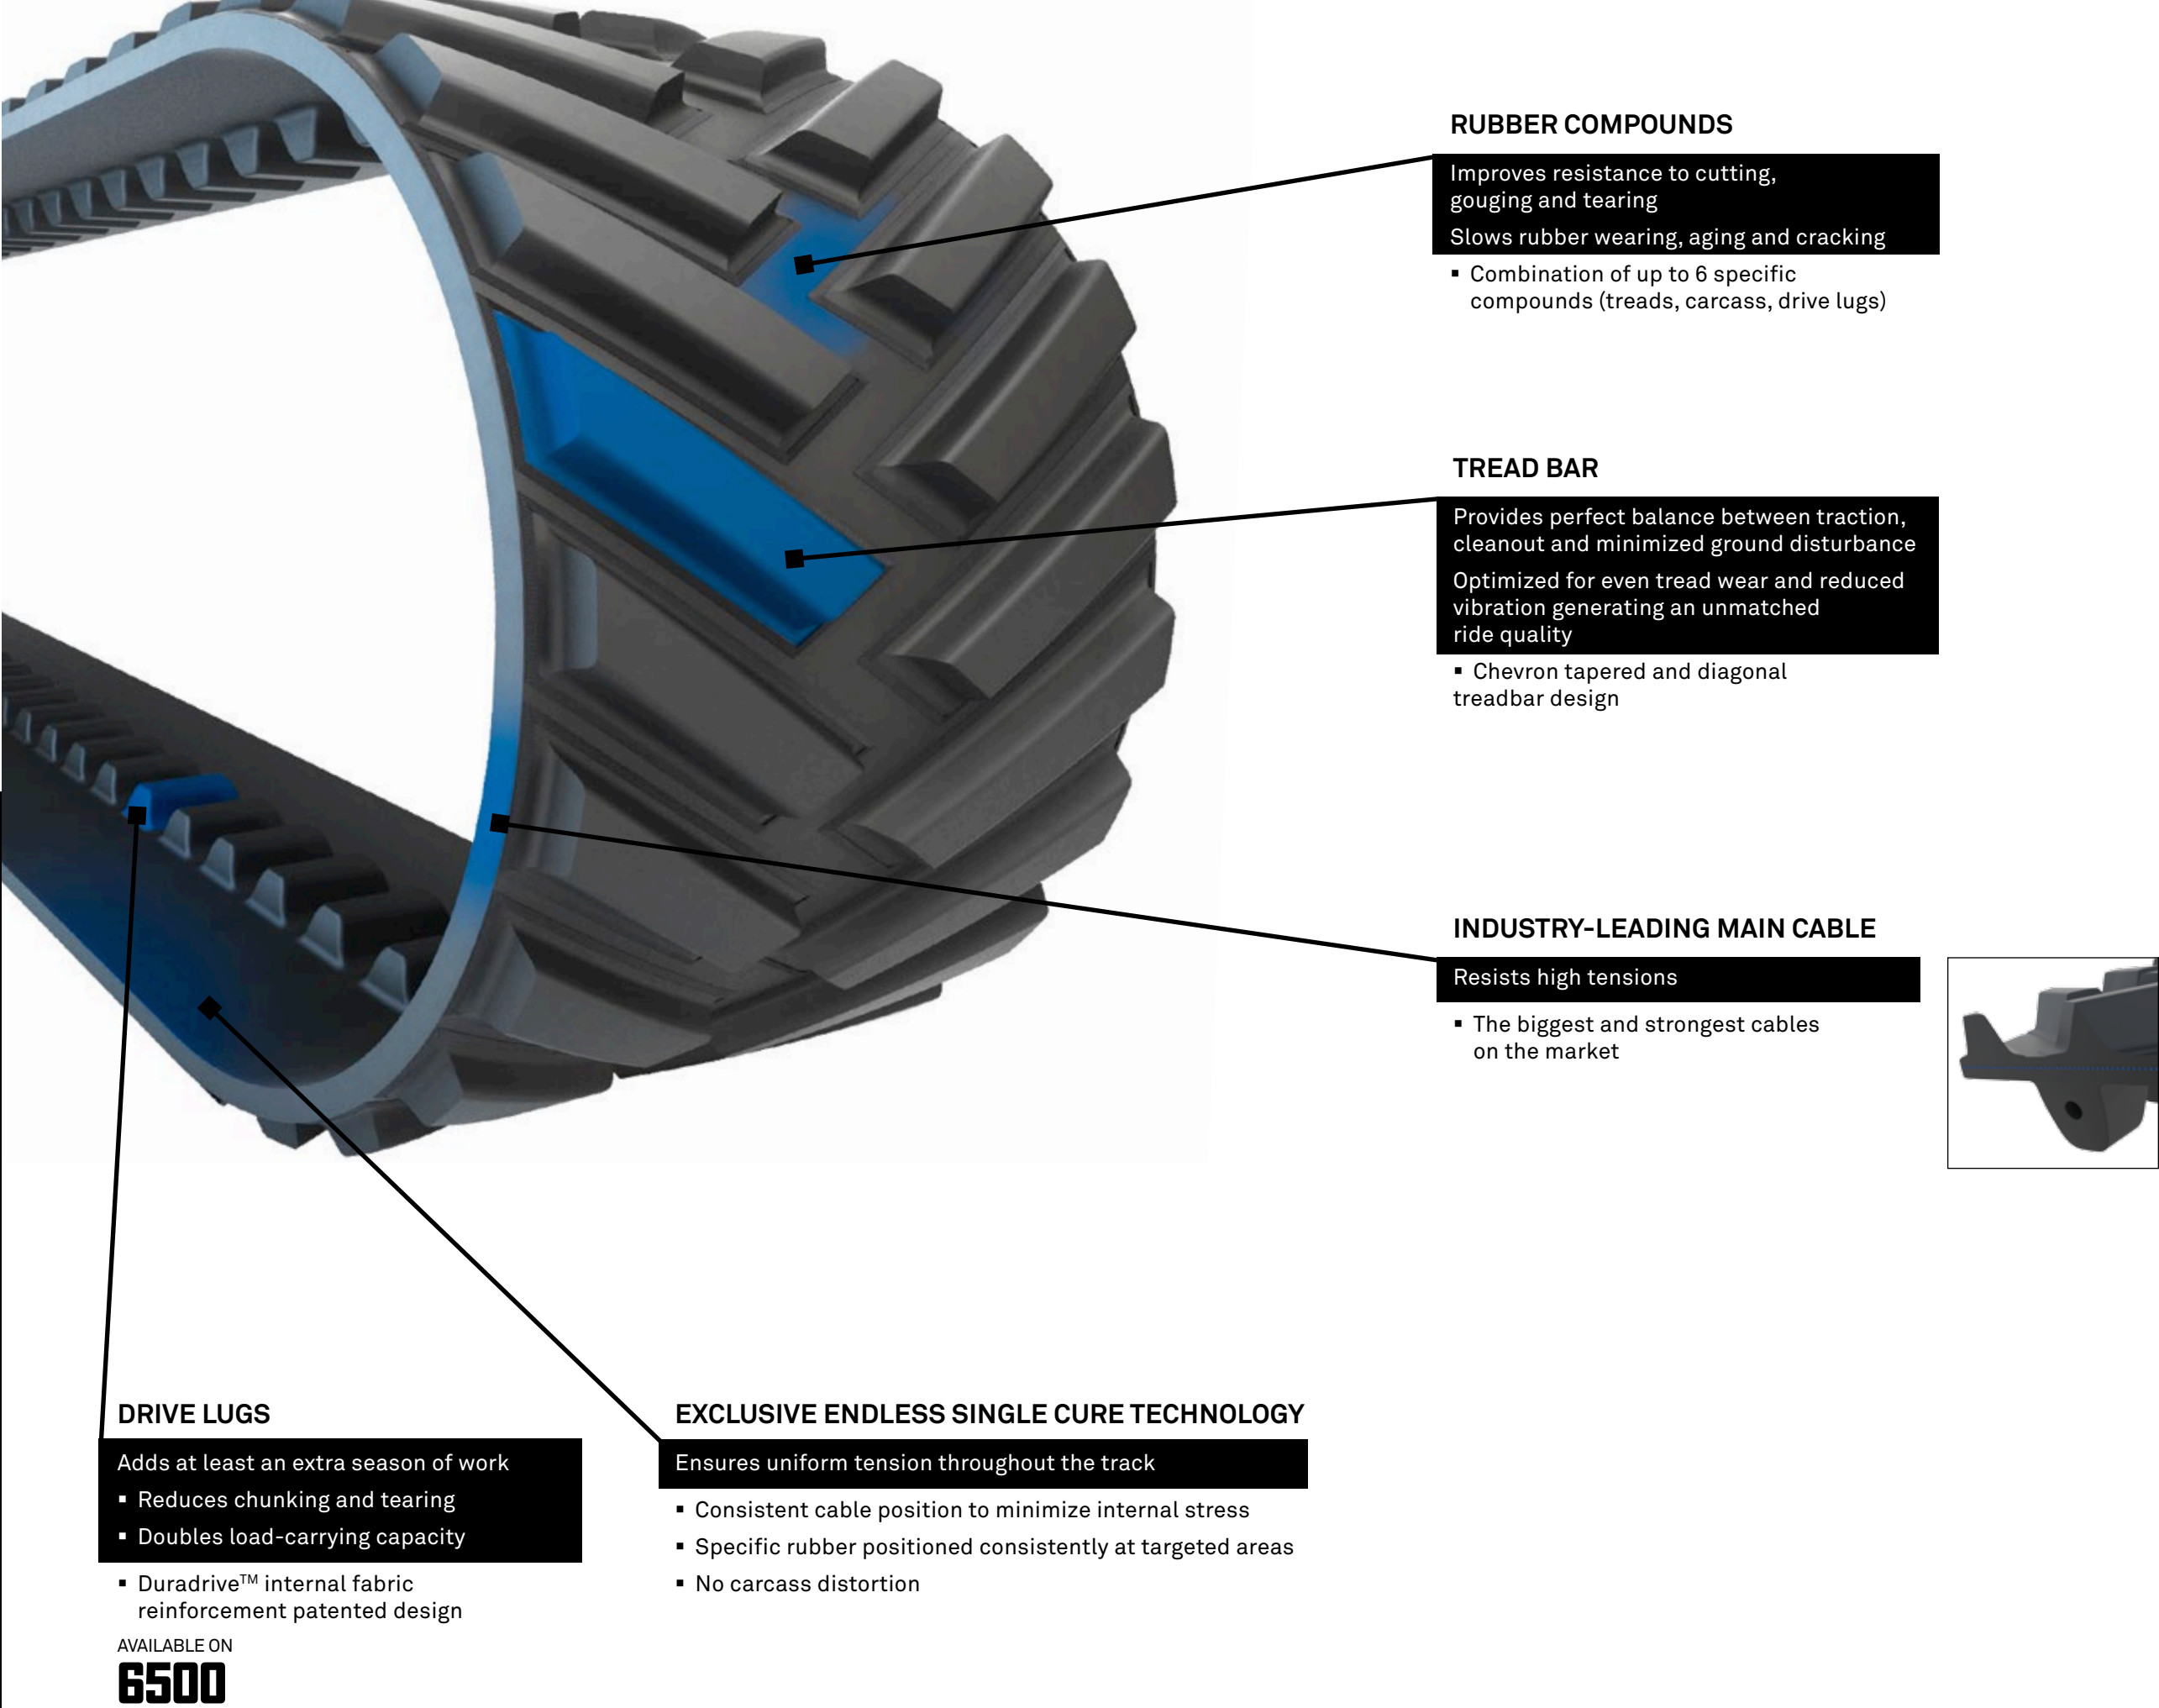



TRACK WIDTH (in.)	TRACK SERIES	PRODUCT FAMILY	PART NUMBER	OEM PART NUMBER	TREAD				GUIDE/DRIVE LUGS		CARCASS		
					Qty	Height (in.)	Tip width (in.)	Pitch (in.)	Qty	Length (in.)	Plies	Main cable size (mm)	Thickness (mm)
CAT Challenger 35/45/55	16	5500	General AG	650-1602	48 RH	2.6	2.25	6.8	48	4.8	4	5.4	39
		5500	General AG	650-1603	48 LH	2.6	2.25	6.8	48	48	4	5.4	39
		3500	General AG	630-1601	96	2.6	1.5	6.8	36	5.5	3	5.4	31
		2500	General AG	620-1606	96	2.1	2.0	6.8	36	5.5	3	5.4	29
	18	5500	General AG	650-1802	96	2.6	2.25	6.8	48	4.8	4	5.4	39
		5500	High roading	650-1842	48 RH	2.6	2.25	6.8	48	4.8	4	5.4	39
		5500	High roading	650-1843	48 LH	2.6	2.25	6.8	48	4.8	4	5.4	39
		5500	High traction	650-1841	72	2.6	1.5	9.0	48	4.8	4	5.4	39
		3500	General AG	630-1801	96	2.6	1.5	6.8	36	5.5	3	5.4	31
		2500	General AG	620-1805	96	2.1	2.0	6.8	36	5.5	3	5.4	29
	25	5500	General AG	650-2502	96	2.6	2.25	6.8	48	4.8	4	5.4	41
		4500	General AG	F25AQ02916	72	2.6	1.5	9.0	48	4.8	3	4.3	32
		3500	General AG	630-2501	72	2.6	1.5	9.0	48	5.5	4	4.3	32
		2500	General AG	620-2500	72	2.1	2.0	9.0	36	5.5	3	4.3	29
	30	3500	General AG	630-3009	72	2.6	1.5	9.0	48	5.5	4	4.3	35
CAT Challenger 65/75/85/95		2500	General AG	620-3069	72	2.1	2.0	9.0	36	5.5	4	4.3	32
	25	5500	General AG	652-2506	96	2.6	1.5	7.2	48	5.0	4	5.4	41
		3500	General AG	632-2529	74	2.6	1.5	9.3	36	6.2	3	4.3	36
		2500	General AG	622-2515	68	2.1	2.0	10.1	36	5.0	3	4.3	32
	27.5	5500	General AG	652-2702	96	2.6	1.5	7.2	48	5.0	3	5.4	41
		5500	General AG	652-2713	96	2.6	1.5	7.2	48	5.0	4	5.4	41
		5500	High roading	652-2714	96	2.6	1.9	7.2	48	5.0	4	5.4	41
		4500	General AG	F27AL02917	74	2.6	1.5	9.3	48	5.0	3	4.3	34
		3500	General AG	632-2711	74	2.6	1.5	9.3	36	6.2	3	4.3	36
		3500	Low ground disturbance	632-2715	96	1.6	2.8	7.2	48	5.0	3	4.3	36
	30	5500	General AG	652-3004	96	2.6	1.5	7.2	48	5.0	3	5.4	41
		5500	General AG	652-3055	96	2.6	1.5	7.2	48	5.0	4	5.4	41
		5500	High traction	652-3049	74	2.6	1.5	9.3	48	5.0	4	5.4	41
		5500	High roading	652-3052	96	2.6	1.9	7.2	48	5.0	4	5.4	41
		4500	General AG	F30AL02918	74	2.6	1.5	9.3	48	5.0	3	4.3	34
		3500	General AG	632-3048	74	2.6	1.5	9.3	36	6.2	3	4.3	36
		3500	Low ground disturbance	632-3057	96	1.6	2.8	7.2	48	5.0	3	4.3	36
		2500	General AG	622-3007	68	2.1	2.0	10.1	36	5.0	3	4.3	32

AGRICULTURAL TRACK

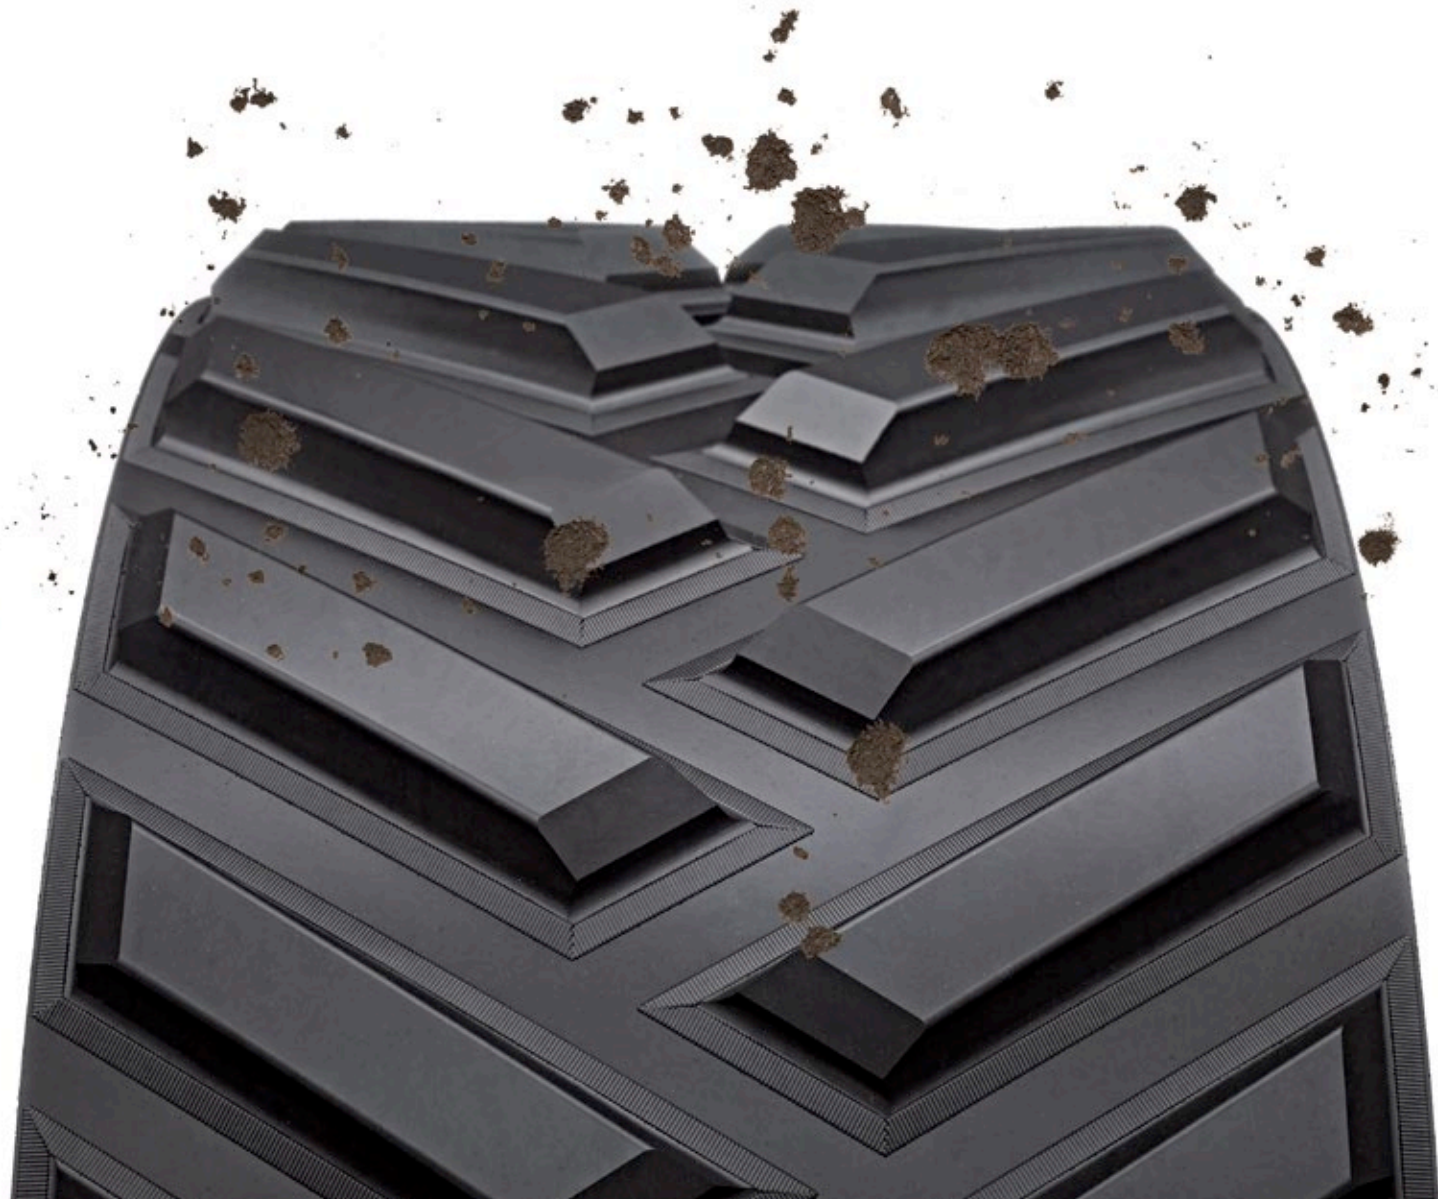

CAT

Camso is the best of Camoplast and Solideal.
To keep moving forward while staying true to our history,
we're now the Road Free company.

camso.co



FORMERLY
CAMOPLAST
SOLIDEAL



CAMOPLAST DURABUILT
TRACKS ARE BECOMING
CAMSO TRACKS

Printed in Canada.

1507_Camso_AgBrochureTracks_2015_CAT






GENERAL AG APPLICATIONS

Built to provide an excellent combination of traction and comfort with minimal soil disturbance

SPECIALTY APPLICATIONS

Available for selected models/series





HIGH TRACTION


Optimized for deep penetration in hard soils

Large tread pitch and narrow tip width treadbar

- Increases soil penetration
- Excellent mud cleanout in muddy conditions

Traction 

Less Compaction 


Roading Ability 


HIGH ROADING


Optimized tread life, ride quality and control for roading operation or high pulling on hard ground

Diagonal tread pattern and chevron tapered wide tip width treadbar

- Added tread volume
- Increases carcass stiffness
- Provides up to 10% more surface area

Traction 

Less Compaction 


Roading Ability 


LOW GROUND DISTURBANCE


Optimized for maximum weight distribution for minimal soil disturbance or berming


Shallow and wide tip width treadbar

- Low profile tight pitch
- Provides 40% more treadbar than standard tracks
- Contact patch is over 100% larger than an equivalent standard track

Traction 

Less Compaction 

Roading Ability 

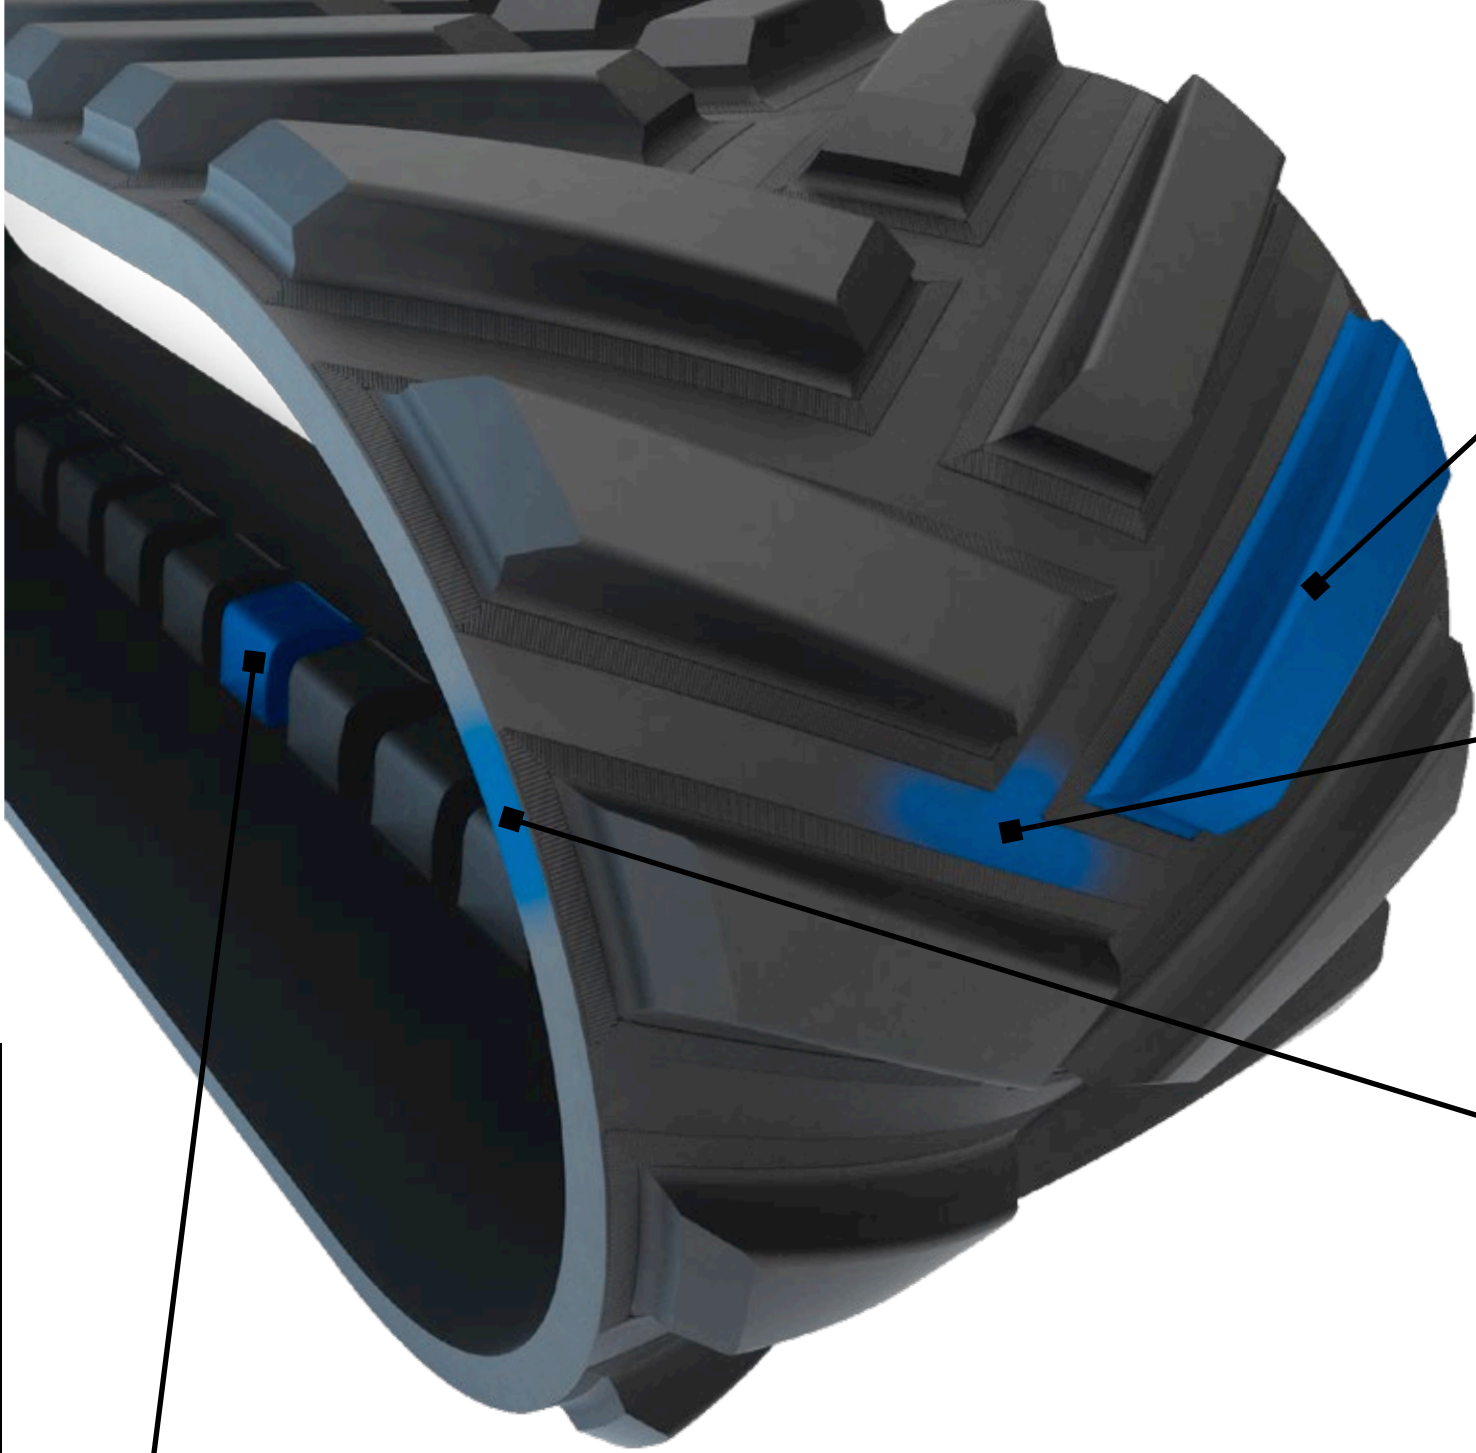

TREAD BAR

Provides perfect balance between traction, cleanout and minimized ground disturbance

Optimized for even tread wear and reduced vibration generating an unmatched ride quality

- Chevron tapered and diagonal treadbar design

TRACKSHIELD™ CARCASS

Increases the life of your track

- Provides a wear and puncture-resistant carcass

AVAILABLE ON


4500 + 20% improvement (over 3500)



INDUSTRY-LEADING MAIN CABLE

Resists high tensions

- The biggest and strongest cables on the market



GUIDE LUGS

Maximizes guiding surface

- Optimized lug geometry

AVAILABLE ON

4500 Increases side load performance

Operating in side hill application greatly increases lug life

EXCLUSIVE ENDLESS SINGLE CURE TECHNOLOGY

Ensures uniform tension throughout the track

- Consistent cable position to minimize internal stress
- Specific rubber positioned consistently at targeted areas
- No carcass distortion

RUBBER COMPOUNDS

Improves resistance to cutting, gouging and tearing

Slows rubber wearing, aging and cracking

- Combination of up to 6 specific compounds (treads, carcass, guide lugs)

The Camso 2500, 3500, 4500, 5500 are available on CAT Challenger tractors.



TRACK WIDTH (in.)		TRACK SERIES	PRODUCT FAMILY	PART NUMBER	OEM PART NUMBER	TREAD				GUIDE/DRIVE LUGS		CARCASS		
						Qty	Heigh (in.)	Tip width (in.)	Pitch (in.)	Qty	Length (in.)	Plies	Main cable size (mm)	Thickness (mm)
8000T	16	5500	General AG	651-1604	R222974	48 RH	2.6	2.25	6.9	48	4.7	4	5.4	41
		5500	General AG	651-1605	R222975	48 LH	2.6	2.25	6.9	48	4.7	4	5.4	41
		3500	General AG	631-1608	R241742	96	2.6	2.25	6.9	48	4.1	3	5.4	34
		2500	General AG	621-1607	R246868	96	2.1	2.65	6.9	48	4.1	3	5.4	31
	18	5500	General AG	651-1804	R222976	96	2.6	2.25	6.9	48	4.7	4	5.4	41
		5500	High roading	651-1823	R312148	48 RH	2.6	2.25	6.9	48	4.2	4	5.4	39
		5500	High roading	651-1824	R312149	48 LH	2.6	2.25	6.9	48	4.2	4	5.4	39
		3500	General AG	631-1803	R241743	96	2.6	1.5	6.9	48	4.1	4	5.4	32
		2500	General AG	621-1806	R246869	96	2.1	2.0	6.9	48	4.1	3	5.4	29
	25	5500	General AG	651-2504	R241750	96	2.6	2.25	6.9	48	4.7	4	5.4	41
		4500	General AG	F25AT01942	R545939	96	2.6	1.5	6.9	48	4.7	3	4.3	32
		3500	General AG	631-2509	R241745	96	2.6	1.5	6.9	48	4.1	4	4.3	32
		3500	High traction	631-2503	R220829	78	2.6	1.5	8.5	48	4.1	4	4.3	32
		2500	General AG	621-2510	R246870	96	2.1	2.0	6.9	48	4.1	3	4.3	29
	30	5500	General AG	651-3039	R292531	96	2.6	2.25	6.9	48	4.7	4	5.4	41
		4500	General AG	F30AT02943	R545938	96	2.6	1.5	6.9	48	4.7	3	4.3	32
		3500	General AG	631-3040	R292528	96	2.6	1.5	6.9	48	4.1	4	4.3	32
		3500	High traction	631-3038	R292526	78	2.6	1.5	8.5	48	4.1	4	4.3	35
		2500	General AG	621-3037	R293500	96	2.0	1.75	6.9	48	4.1	3	4.3	29
8RT	16	6500	General AG	E16AY02944	R545855	50	2.8	2.5	7.3	46	5.3	4	6.7	44
		6500	General AG	E16AY02945	R545854	50	2.8	2.5	7.3	46	5.3	4	6.7	44
		4500	General AG	F16AY02946	R545853	50	2.6	1.6	7.3	46	4.5	4	5.4	37
		4500	General AG	F16AY02947	R545852	50	2.6	1.6	7.3	46	4.5	4	5.4	37
	18	6500	General AG	E18AY02948	R545859	100	2.8	2.5	7.3	46	5.3	4	6.7	44
		6500	High roading	E18AY02949	R545857	50	2.8	2.5	7.3	46	5.3	4	6.7	44
		6500	High roading	E18AY02950	R545858	50	2.8	2.5	7.3	46	5.3	4	6.7	44
		4500	General AG	F18AY02951	R545856	100	2.6	1.6	7.3	46	4.5	4	5.4	37
	24	4500	General AG	F24AY03010	R545860	100	2.6	1.6	7.3	46	4.5	4	5.4	37
	25	6500	General AG	E25AY03011	R545862	100	2.8	2.5	7.3	46	5.3	4	5.4	42
		4500	General AG	F25AY02952	R545865	100	2.6	1.6	7.3	46	5.3	4	5.4	37
		4500	General AG	F25AY03012	R545861	100	2.6	1.6	7.3	46	4.5	4	5.4	37
	30	6500	General AG	E30AY03013	R545864	100	2.8	2.5	7.3	46	5.3	4	5.4	42
		4500	General AG	F30AY02953	R545866	100	2.6	1.6	7.3	46	5.3	4	5.4	37
		4500	General AG	F30AY03014	R545863	100	2.6	1.6	7.3	46	4.5	4	5.4	37
9000T	30	5500	General AG	653-3010	R241748	92	2.9	2.7	8.4	54	5.25	4	5.4	41
		3500	General AG	633-3019	R257977	92	2.8	1.6	8.4	54	4.5	4	5.4	37
		2500	General AG	623-3020	R293501	94	2.0	2.3	8.2	54	4.5	3	5.4	34
	36	5500	General AG	653-3601	R241749	92	2.9	2.7	8.4	54	5.25	4	5.4	41
	3500	General AG	633-3606	R257978	92	2.8	1.6	8.4	54	4.5	4	5.4	37	
9RT	30	6500	Scraper	E30AV02954	R545869	88	2.3	3	9.0	50	5.3	4	6.7	44
		6500	General AG	E30AV03019	R545868	88	2.9	2.7	9.0	50	5.3	4	5.4	44
		4500	General AG	F30AV02955	R545872	88	2.6	2.2	9.0	50	5.3	4	5.4	37
		4500	General AG	F30AV03020	R545867	88	2.6	2.2	9.0	50	4.5	4	5.4	37
	36	6500	General AG	E36AV03021	R545871	88	2.9	2.7	9.0	50	5.3	4	5.4	44
		4500	General AG	F36AV03022	R545870	88	2.6	2.2	9.0	50	4.5	4	5.4	37

Printed in Canada.

1507_Camso_AgBrochureTracks_JD



JOHN DEERE

Camso is the best of Camoplast and Solideal.
To keep moving forward while staying true to our history,
we're now the Road Free company.

camso.co



FORMERLY
CAMOPLAST
SOLIDEAL



CAMOPLAST DURABUILT
TRACKS ARE BECOMING
CAMSO TRACKS





GENERAL AG APPLICATIONS

Built to provide an excellent combination of traction and comfort with minimal soil disturbance

SPECIALTY APPLICATIONS

Available for selected models/series



HIGH TRACTION

- Optimized for deep penetration in hard soils
- Large tread pitch and narrow tip width treadbar
- Increases soil penetration
 - Excellent mud cleanout in muddy conditions

Traction

Less Compaction

Roading Ability

HIGH ROADING

- Optimized tread life, ride quality and control for roading operation or high pulling on hard ground
- Diagonal tread pattern and chevron tapered wide tip width treadbar
- Added tread volume
 - Increases carcass stiffness
 - Provides up to 10% more surface area


Traction

Less Compaction

Roading Ability

SCRAPER

- Built to withstand the toughest commercial or agricultural scraper conditions with maximum service life
- Trackshield™: 45% increased puncture and wear resistance (over 5500)
- 6.7 mm cable: 24% increased tear resistance (over 5.4 mm)

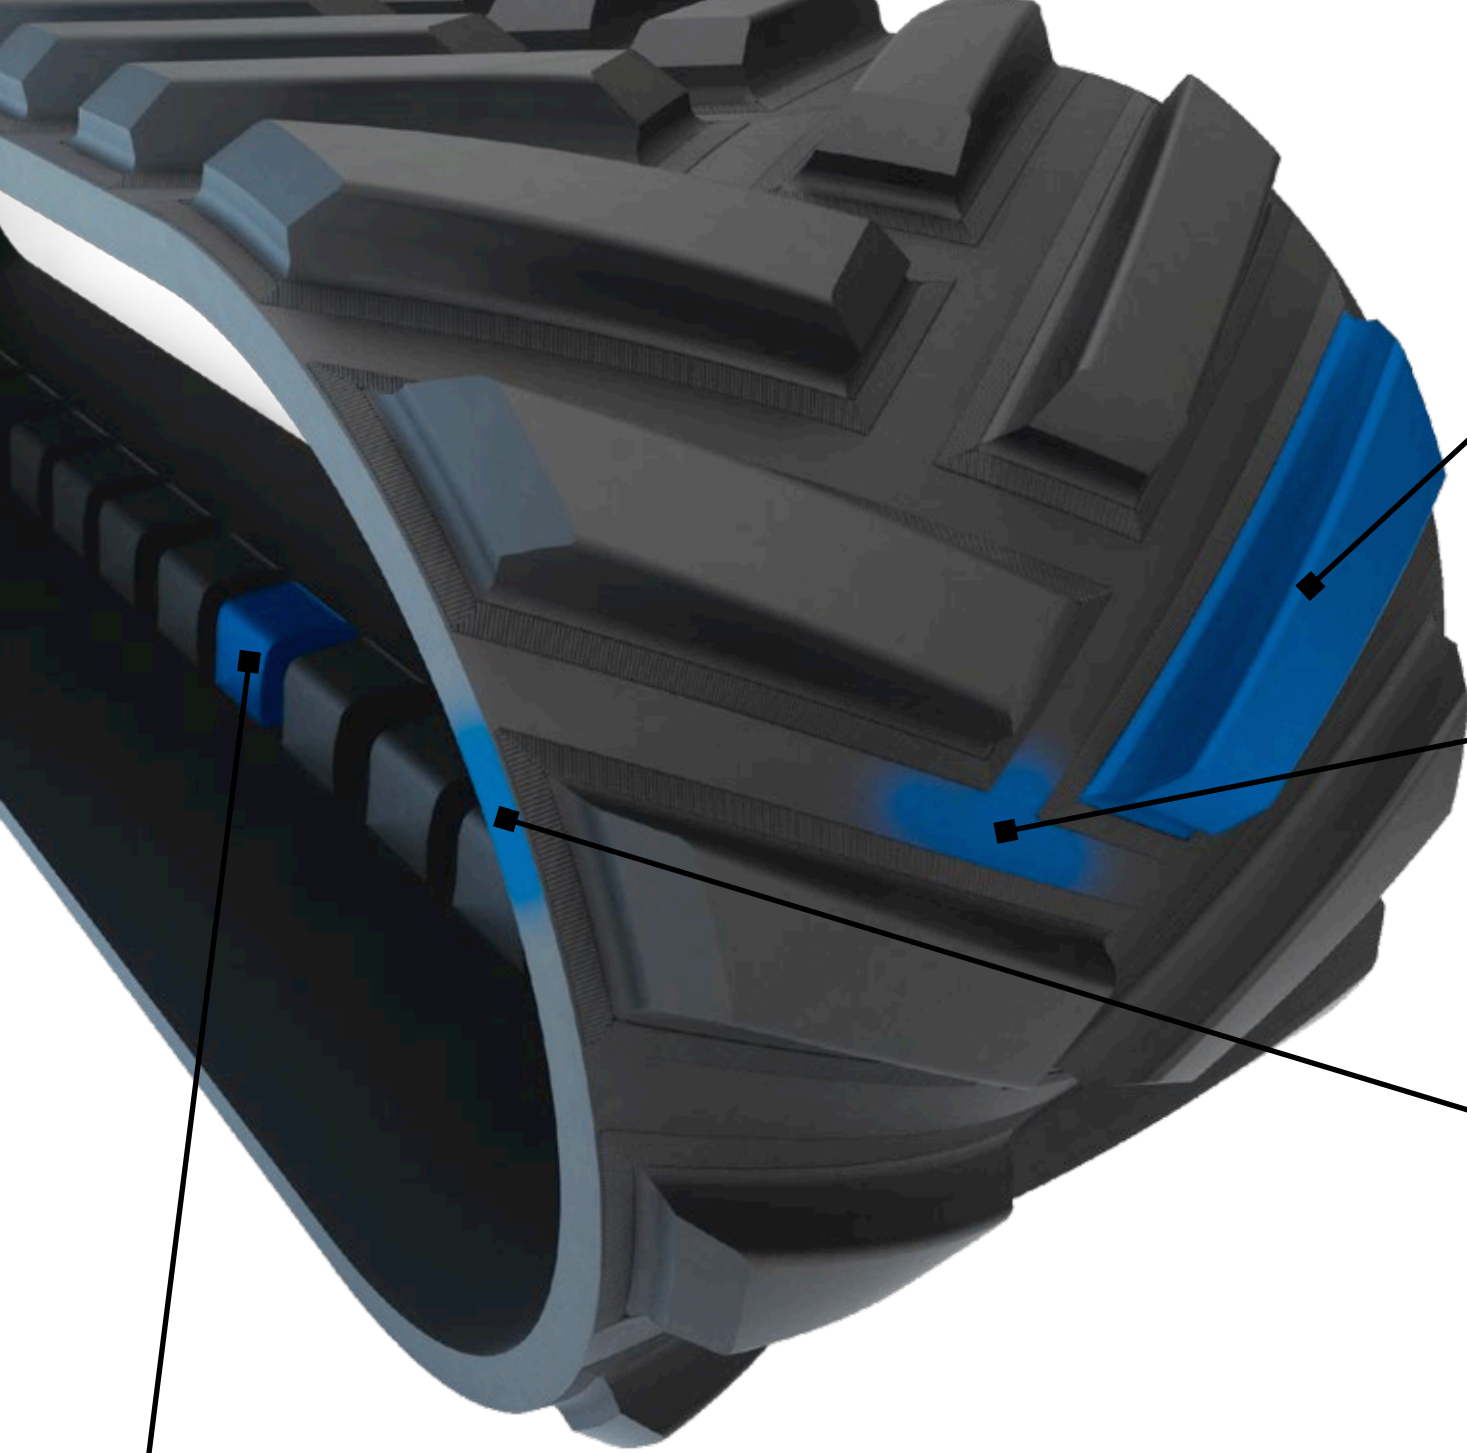


TREAD BAR

- Provides perfect balance between traction, cleanout and minimized ground disturbance
- Optimized for even tread wear and reduced vibration generating an unmatched ride quality
- Chevron tapered and diagonal treadbar design


TRACKSHIELD™ CARCASS

- Increases the life of your track
- Provides a wear and puncture-resistant carcass
- AVAILABLE ON
- | | |
|------|-------------------------------|
| 4500 | + 20% improvement (over 3500) |
| 6500 | + 45% improvement (over 5500) |



INDUSTRY-LEADING MAIN CABLE

- Resists high tensions
- The biggest and strongest cables on the market
- AVAILABLE ON
- | | |
|------|---|
| 6500 | 6.7 mm cable: 24% increase in tear resistance (over 5.4 mm) |
|------|---|



GUIDE LUGS

- Maximizes guiding surface
- Optimized lug geometry
- AVAILABLE ON
- | | |
|------|---|
| 4500 | Increases side load performance |
| 6500 | Operating in side hill application greatly increases lug life |

EXCLUSIVE ENDLESS SINGLE CURE TECHNOLOGY

- Ensures uniform tension throughout the track
- Consistent cable position to minimize internal stress
 - Specific rubber positioned consistently at targeted areas
 - No carcass distortion

RUBBER COMPOUNDS

- Improves resistance to cutting, gouging and tearing
- Slows rubber wearing, aging and cracking
- Combination of up to 6 specific compounds (treads, carcass, guide lugs)

The Camso 2500, 3500, 4500, 5500 and 6500 are available on John Deere tractors.