

CAMSO XTRA WALL



SKID STEER
LOADERS



BUILT FOR TOUGH OFF-ROAD APPLICATIONS

The ideal skid steer tire solution for most tough, off-road skid steer applications. Delivers enhanced durability, traction and side impact resistance for excellent performance and low operating costs.

camso.co

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE




TRACTION



**ROAD
FREE
COMPANY**

CAMSO XTRA WALL



WIDE, DEEP LUG DESIGN

- Provides enhanced durability and traction in off-road conditions

HAULER STEPPED TREAD DESIGN

- Provides enhanced cleanout for improved traction



REINFORCED SIDEWALL


- Provides improved side impact resistance

RIM PROTECTOR

- Protects wheel from impact damage

| TIRE SIZE | PR | RIM SIZE | | ACTUAL TIRE DIMENSIONS | | | LOAD INDEX | SPEED SYMBOL | INFLATION PRESSURE [PSI] | MAXIMUM TIRE LOAD [lb] | | |
|--------------------------|----|-------------|-------------|------------------------|----------|--------------|------------|--------------|--------------------------|------------------------|--------|--------|
| | | RECOMMENDED | ALTERNATIVE | O.D [in] | O.W [in] | O.T.D [32nd] | | | | 5 mph | 10 mph | Static |
| 5.70-12 | 6 | 4.50I | 5JA | 22.3 | 6.0 | 16 | 93 | A2 | 60 | 1450 | 1150 | 2300 |
| 23x8.5-12 | 6 | 7.00I | 7JA | 22.5 | 8.4 | 18 | 101 | A2 | 50 | 1800 | 1450 | 2850 |
| 23x8.5-12 | 12 | 7.00I | 7JA | 23.1 | 9.1 | 18 | 115 | A2 | 100 | 2750 | 2150 | 4300 |
| 26x12-12 | 10 | 10.50 | 8.50/8.50JA | 25.8 | 11.7 | 27 | 124 | A2 | 64 | 3600 | 2850 | 5700 |
| 27x10-12 | 14 | 8.00G | - | 27.6 | 10.4 | 24 | 132 | A2 | 100 | 7850 | 6200 | 12350 |
| 7.00-15 | 6 | 5.50 | 6LB | 30.5 | 8.7 | 20 | 121 | A2 | 59 | 3200 | 2500 | 5050 |
| 27x8.5-15 | 6 | 7JA | 6.5K/7J | 26.7 | 8.4 | 19 | 112 | A2 | 44 | 2500 | 1950 | 3950 |
| 31x15.5-15 | 8 | 13.00 | 13LB | 31.0 | 15.1 | 30 | 126 | A2 | 44 | 3750 | 2950 | 5900 |
| 26x12-16.5 (300/40-16.5) | 10 | 9.75 | - | 26.1 | 11.1 | 30 | 124 | A2 | 57 | 3600 | 2850 | 5700 |
| 10-16.5 | 6 | 8.25 | - | 30.0 | 10.8 | 22 | 124 | A2 | 45 | 3500 | 2800 | 5550 |
| 10-16.5 | 8 | 8.25 | - | 30.0 | 10.8 | 22 | 129 | A2 | 60 | 4150 | 3250 | 6550 |
| 10-16.5 | 10 | 8.25 | - | 30.1 | 10.9 | 22 | 134 | A2 | 75 | 4700 | 3750 | 7450 |
| 12-16.5 | 8 | 9.75 | - | 32.5 | 12.6 | 23 | 135 | A2 | 50 | 4800 | 3800 | 7600 |
| 12-16.5 | 10 | 9.75 | - | 32.3 | 12.5 | 23 | 140 | A2 | 64 | 5600 | 4450 | 8850 |
| 12-16.5 | 12 | 9.75 | - | 32.4 | 12.6 | 23 | 145 | A2 | 80 | 6350 | 5050 | 10050 |
| 14-17.5 | 12 | 10.50 | - | 35.9 | 13.8 | 39 | 152 | A2 | 69 | 7850 | 6200 | 12400 |

VERTICAL DEFLECTION CHART (1875 kg load)
10-16.5 8PR inflated 5.2 bar (61 PSI)

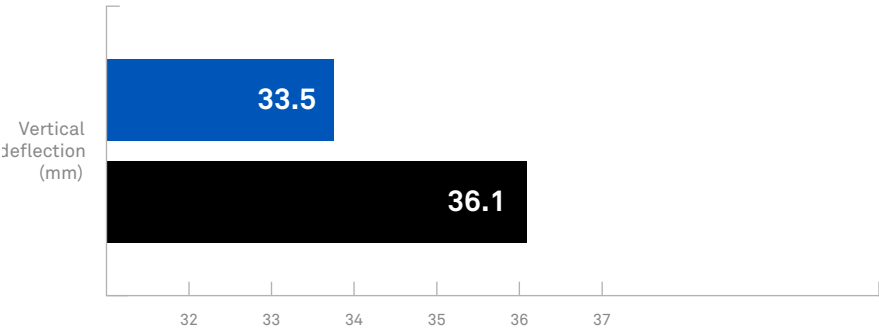

CAMSO XTRA WALL

STANDARD R4

Camso Xtra Wall's heavy-duty carcass and sidewall design resists deflection under load and is **more robust and stable** than a standard R4 tire.

AUTHORIZED DISTRIBUTOR:

camso.co

