








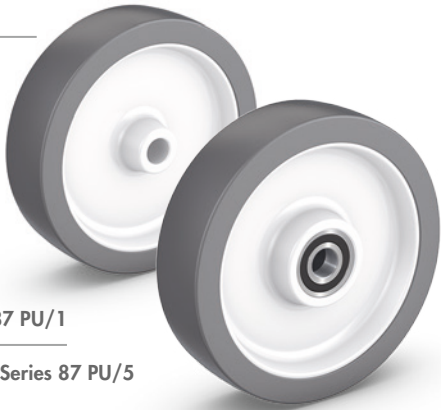

PE·VO·THAN® wheels



Series 87 PU/1

Series 87 PU/5

							
Article code	mm	mm	mm	mm	mm	mm	kg
87 PU/080/035/1/12	80	35	40	–	20	12	150
87 PU/100/040/1/15	100	40	50	–	25	15	200
87 PU/125/045/1/15	125	45	50	–	25	15	250
87 PU/150/045/1/20	150	45	50	–	35	20	380
87 PU/160/050/1/20	160	50	60	–	35	20	430
87 PU/200/050/1/20	200	50	60	–	35	20	500
87 PU/080/035/5/08	80	35	35	41	–	08	150
87 PU/080/035/5/12	80	35	35	31	–	12	150
87 PU/100/040/5/10	100	40	45	51	45	10	200
87 PU/100/040/5/15	100	40	45	41	45	15	200
87 PU/125/045/5/12	125	45	45	51	45	12	250
87 PU/125/045/5/15	125	45	45	41	45	15	250
87 PU/150/045/5/12	150	45	45	51	65	12	380
87 PU/150/045/5/20	150	45	45	41	65	20	380
87 PU/160/050/5/12	160	50	55	61	65	12	430
87 PU/160/050/5/20	160	50	55	51	65	20	430
87 PU/200/050/5/12	200	50	55	61	60	12	500
87 PU/200/050/5/20	200	50	55	51	60	20	500
87 PU/080/035/5R/12	80	35	35	31	41	12	150
87 PU/100/040/5R/15	100	40	45	41	45	15	160
87 PU/125/045/5R/15	125	45	45	41	45	15	200
87 PU/150/045/5R/20	150	45	45	41	65	20	380
87 PU/160/050/5R/20	160	50	55	51	65	20	430
87 PU/200/050/5R/20	200	50	55	51	60	20	500

PEVOTHAN® wheels

PEVOLON® rim with a tread made of high-quality thermoplastic polyurethane (96° Shore A), with plain bearing (/1), ball bearings (/5) or stainless ball bearings (/5R).

PE·VO·THAN® industrial castors




















PE·VO·THAN® industrial castors








Series 32 PU

Series 31 PU

								
Article code	mm	mm	mm	mm	mm	mm	mm	kg
31 PU/080/35/1 L	80	35	108	105 x 85	80 x 60	9	38	100
31 PU/100/34/1 L	100	34	128	105 x 85	80 x 60	9	38	140
31 PU/125/37/1 L	125	37	155	105 x 85	80 x 60	9	45	180
31 PU/150/45/1	150	45	194	135 x 110	105 x 80	11	55	225
31 PU/200/50/1	200	50	239	135 x 110	105 x 80	11	55	400
31 PU/080/35/3 L	80	35	108	105 x 85	80 x 60	9	38	100
31 PU/100/34/3 L	100	34	128	105 x 85	80 x 60	9	38	140
31 PU/125/37/3 L	125	37	155	105 x 85	80 x 60	9	45	180
31 PU/160/50/3	160	50	199	135 x 110	105 x 80	11	55	250
31 PU/200/50/3	200	50	239	135 x 110	105 x 80	11	55	400


							
Article code	mm	mm	mm	mm	mm	mm	kg
32 PU/080/35/1 L	80	35	108	105 x 85	80 x 60	9	100
32 PU/100/34/1 L	100	34	128	105 x 85	80 x 60	9	140
32 PU/125/37/1 L	125	37	155	105 x 85	80 x 60	9	180
32 PU/150/45/1	150	45	194	135 x 110	105 x 80	11	225
32 PU/200/50/1	200	50	239	135 x 110	105 x 80	11	400
32 PU/080/35/3 L	80	35	108	105 x 85	80 x 60	9	100
32 PU/100/34/3 L	100	34	128	105 x 85	80 x 60	9	140
32 PU/125/37/3 L	125	37	155	105 x 85	80 x 60	9	180
32 PU/160/50/3	160	50	199	135 x 110	105 x 80	11	250
32 PU/200/50/3	200	50	239	135 x 110	105 x 80	11	400



Industrial swivel castors with PEVOTHAN® wheels

PEVOTHAN® wheels series 89 PU (80° Shore A) with plain bearing (/1) or roller bearing (/3), see page 51.

Industrial fixed castors



Industrial swivel castor brackets with a load capacity of up to 400 kg

Housings made of pressed steel, zinc and chromated. Swivel head with double ball bearings, dust and splash proof, with riveted kingpin. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.

PE·VO·THAN® industrial castors







Series 52 PU/1

Series 51 PU/1

							
Article code	mm	mm	mm	mm	mm	mm	kg
51 PU/080/35/1 L	80	35	108	105 x 85	80 x 60	9	120
51 PU/100/40/1	100	40	126	135 x 110	105 x 80	11	200
51 PU/125/45/1	125	45	164	135 x 110	105 x 80	11	250
51 PU/150/45/1	150	45	194	135 x 110	105 x 80	11	300
51 PU/160/50/1	160	50	199	135 x 110	105 x 80	11	300
51 PU/200/50/1	200	50	239	135 x 110	105 x 80	11	400

						
Article code	mm	mm	mm	mm	mm	kg
52 PU/080/35/1 L	80	35	108	105 x 85	80 x 60	120
52 PU/100/40/1	100	40	126	135 x 110	105 x 80	200
52 PU/125/45/1	125	45	164	135 x 110	105 x 80	250
52 PU/150/45/1	150	45	194	135 x 110	105 x 80	300
52 PU/160/50/1	160	50	199	135 x 110	105 x 80	300
52 PU/200/50/1	200	50	239	135 x 110	105 x 80	400


1-way directional lock only available for plate 135 x 110 mm.



Industrial swivel castors with PEVOTHAN® wheels (plain bearing)

Wheels series 87 PU with plain bearing (/1), see page 52.

Industrial fixed castors



Industrial swivel castor brackets with a load capacity of up to 400 kg

Housings made of pressed steel, zinc and chromated. Swivel head with double ball bearings, dust and splash proof, with riveted kingpin. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.

* with locking device code: 51 FZ PU/..

PE·VO·THAN® industrial castors



Series 52 PU/5

Series 51 PU/5

								
Article code	mm	mm	mm	mm	mm	mm	mm	kg
51 PU/080/35/5 L	80	35	108	105 x 85	80 x 60	9	38	120
51 PU/100/40/5	100	40	126	135 x 110	105 x 80	11	40	200
51 PU/125/45/5	125	45	164	135 x 110	105 x 80	11	55	250
51 PU/150/45/5	150	45	194	135 x 110	105 x 80	11	55	300
51 PU/160/50/5	160	50	199	135 x 110	105 x 80	11	55	300
51 PU/200/50/5	200	50	239	135 x 110	105 x 80	11	55	400


Industrial swivel castors with PEVOTHAN® wheels

Pressed steel bracket. With wheels series 87 PU with ball bearings (/5), see page 52.

								
Article code	mm	mm	mm	mm	mm	mm	mm	kg
52 PU/080/35/5 L	80	35	108	105 x 85	80 x 60	9	120	
52 PU/100/40/5	100	40	126	135 x 110	105 x 80	11	200	
52 PU/125/45/5	125	45	164	135 x 110	105 x 80	11	250	
52 PU/150/45/5	150	45	194	135 x 110	105 x 80	11	300	
52 PU/160/50/5	160	50	199	135 x 110	105 x 80	11	300	
52 PU/200/50/5	200	50	239	135 x 110	105 x 80	11	400	

1-way directional lock not available for plate 105 x 85 mm.







Industrial fixed castors



Industrial swivel castor brackets with a load capacity of up to 400 kg

Housings made of pressed steel, zinc and chromated. Swivel head with double ball bearings, dust and splash proof, with riveted kingpin. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.

* with locking device code: 51 FZ PU/..










ALLSTOP total locking device Code: 51 F PU/...	single bolt hole Code: 51 PU/...R	single bolt hole/total lock Code: 51 F PU/...R
		
directional lock Code: 51 PU/...1RIF	foot protection Code: ...PRO	stem fitting Code: 51 Z PU/...*
		

PE·VO·THAN® heavy-duty industrial castors












Series WB PU/5

Series WL PU/5


								
Article code	mm	mm	mm	mm	mm	mm	mm	kg
WL PU/080/35/5 L	80	35	118	105 x 85	80 x 60	9	40	150
WL PU/100/40/5 L	100	40	140	105 x 85	80 x 60	9	45	200
WL PU/100/40/5	100	40	148	135 x 110	105 x 80	11	50	200
WL PU/125/45/5 L	125	45	165	105 x 85	80 x 60	9	45	250
WL PU/125/45/5	125	45	178	135 x 110	105 x 80	11	50	250
WL PU/150/45/5	150	45	205	135 x 110	105 x 80	11	50	380
WL PU/160/50/5	160	50	210	135 x 110	105 x 80	11	50	430
WL PU/200/50/5	200	50	250	135 x 110	105 x 80	11	55	500

Heavy-duty industrial swivel castors with PEVOTHAN® wheels

Wheels series 87 PU with ball bearings (/5), see page 52.




								
Article code	mm	mm	mm	mm	mm	mm	mm	kg
WB PU/080/35/5 L	80	35	118	105 x 85	80 x 60	9	150	
WB PU/100/40/5 L	100	40	140	105 x 85	80 x 60	9	200	
WB PU/100/40/5	100	40	148	135 x 110	105 x 80	11	200	
WB PU/125/45/5 L	125	45	165	105 x 85	80 x 60	9	250	
WB PU/125/45/5	125	45	178	135 x 110	105 x 80	11	250	
WB PU/150/45/5	150	45	205	135 x 110	105 x 80	11	380	
WB PU/160/50/5	160	50	210	135 x 110	105 x 80	11	430	
WB PU/200/50/5	200	50	250	135 x 110	105 x 80	11	500	

Industrial fixed castors



Industrial swivel castor brackets with a load capacity of up to 500 kg

Housings made of strong pressed steel, zinc and chromated. Swivel head with double ball bearings, dust and splash proof. Without kingpin. With grease nipple. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.

ALLSTOP total locking device Code: WLF PU/...	4-way directional lock Code: WL PU/...4RIF	wheel and directional lock Code: WLF PU/...4RIF
		
foot protection Code: ...PRO		
