

PE·VO·LON®/PE·VO·THAN®
stainless steel castors



PE·VO·LON®/PE·VO·THAN®
stainless steel product overview

Stainless steel
CASTORS

We produce stainless steel castor systems with the wheel materials PEVOLON®, PEVOTHAN® and thermoplastic rubber. These were specially developed for wet areas and areas with special hygiene requirements.

Compact brake systems offer long-lasting, secure locking for all areas of application. The dimensions fulfil to the standards of the European manufacturers of castors.



Series 67 NI
Series 68 NI
60 - 100 kg
Page 116



Series 67 PU NI
Series 68 PU NI
40 - 125 kg
Page 117



Series VL
Series VB
150 - 400 kg
Page 118 - 119



Series WL NI
Series WB NI
300 - 750 kg
Page 120



Series 31 PU NI
Series 32 PU NI
100 - 400 kg
Page 121 - 122



Series 31 PS NI
Series 32 PS NI
80 - 300 kg
Page 123 - 124



Series WL PU NI
Series WB PU NI
120 - 500 kg
Page 125



Series XL
Series XB
450 - 550 kg
Page 126














Series TL NI
Series TB NI
700 - 1.200 kg
Page 127











Stainless steel institutional castors



Series 68 NI
Series 67 NI/R
Series 67 NI/P

										
Article code	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
67 NI/075/25/1/P	75	25	107	95 x 70	75 x 45/72 x 52	9	–	33	60	
67 NI/100/32/1/P	100	32	135	95 x 70	75 x 45/72 x 52	9	–	41	80	
67 NI/125/32/1/P	125	32	161	95 x 70	75 x 45/72 x 52	9	–	39	100	
67 NI/075/30/5R/P	75	30	107	95 x 70	75 x 45/72 x 52	9	–	33	60	
67 NI/100/32/5R/P	100	32	135	95 x 70	75 x 45/72 x 52	9	–	41	80	
67 NI/125/32/5R/P	125	32	161	95 x 70	75 x 45/72 x 52	9	–	39	100	
67 NI/075/25/1/R	75	25	104	–	–	–	10	33	60	
67 NI/100/32/1/R	100	32	132	–	–	–	12	41	80	
67 NI/125/32/1/R	125	32	158	–	–	–	12	39	100	
67 NI/075/30/5R/R	75	30	104	–	–	–	10	33	60	
67 NI/100/32/5R/R	100	32	132	–	–	–	12	41	80	
67 NI/125/32/5R/R	125	32	158	–	–	–	12	39	100	

Fixing devices for institutional swivel castors with bold hole fitting(/R), see page 127.

									
Article code	mm	mm	mm	mm	mm	mm	mm	mm	kg
68 NI/075/25/1/P	75	25	107	95 x 77	75 x 45/72 x 52	9	–	60	
68 NI/100/32/1/P	100	32	135	95 x 77	75 x 45/72 x 52	9	–	80	
68 NI/125/32/1/P	125	32	161	95 x 77	75 x 45/72 x 52	9	–	100	
68 NI/075/30/5R/P	75	30	107	95 x 77	75 x 45/72 x 52	9	–	60	
68 NI/100/32/5R/P	100	32	135	95 x 77	75 x 45/72 x 52	9	–	80	
68 NI/125/32/5R/P	125	32	161	95 x 77	75 x 45/72 x 52	9	–	100	

ALLSTOP total locking device
Code: 67 F NI/.../P



single bolt hole/total lock
Code: 67 F NI/.../R




Stainless steel institutional swivel castors with thermoplastic rubber wheels

Wheels series 85 with plain bearing (/1) or stainless steel ball bearing (/5R), see page 130.

Stainless steel institutional fixed castors

Matching the swivel castors with top plate (/P).














Institutional swivel castor brackets with a load capacity of up to 100 kg

Housings made of polished stainless steel. Swivel head with double ball bearing and riveted kingpin. Available with either plate (P) or bolt hole (R) fitting. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.










PE·VO·THAN® stainless steel institutional castors



Series 68 PU NI
Series 67 PU NI/R
Series 67 PU NI/P

										
Article code	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
67 PU NI/050/18/1/P	50	18	71	60 x 60	46 x 46/38 x 38	6	–	21	40	
67 PU NI/075/24/1/P	75	24	107	95 x 70	75 x 45/72 x 52	9	–	33	60	
67 PU NI/100/30/1/P	100	30	135	95 x 70	75 x 45/72 x 52	9	–	41	100	
67 PU NI/125/30/1/P	125	30	161	95 x 70	75 x 45/72 x 52	9	–	39	125	
67 PU NI/075/24/5R/P	75	24	107	95 x 70	75 x 45/72 x 52	9	–	33	60	
67 PU NI/100/30/5R/P	100	30	135	95 x 70	75 x 45/72 x 52	9	–	41	100	
67 PU NI/125/30/5R/P	125	30	161	95 x 70	75 x 45/72 x 52	9	–	39	125	
67 PU NI/050/18/1/R	50	18	69	–	–	–	11	23	40	
67 PU NI/075/24/1/R	75	24	104	–	–	–	10	33	60	
67 PU NI/100/30/1/R	100	30	132	–	–	–	12	41	100	
67 PU NI/125/30/1/R	125	30	158	–	–	–	12	39	125	
67 PU NI/075/24/5R/R	75	24	104	–	–	–	10	33	60	
67 PU NI/100/30/5R/R	100	30	132	–	–	–	12	41	100	
67 PU NI/125/30/5R/R	125	30	158	–	–	–	12	39	125	

Fixing devices for institutional swivel castors with bold hole fitting(/R), see page 127.

								
Article code	in mm	in mm	in mm	in mm	in mm	in mm	in mm	in kg
68 PU NI/050/18/1/P	50	18	71	55 x 55	46 x 46/38 x 38	6	–	40
68 PU NI/075/24/1/P	75	24	107	95 x 77	75 x 45/72 x 52	9	–	60
68 PU NI/100/30/1/P	100	30	135	95 x 77	75 x 45/72 x 52	9	–	100
68 PU NI/125/30/1/P	125	30	161	95 x 77	75 x 45/72 x 52	9	–	125
68 PU NI/075/24/5R/P	75	24	107	95 x 77	75 x 45/72 x 52	9	–	60
68 PU NI/100/30/5R/P	100	30	135	95 x 77	75 x 45/72 x 52	9	–	100
68 PU NI/125/30/5R/P	125	30	161	95 x 77	75 x 45/72 x 52	9	–	125

ALLSTOP total locking device
Code: 67 F PU NI/.../P



single bolt hole/total lock
Code: 67 F PU NI/.../R




Stainless steel institutional swivel castors with PEVOTHAN® wheels

Wheels series 85 PU with plain bearing (/1) or stainless steel ball bearing (/5R), see page 130.

Institutional fixed castors

Matching the swivel castors with top plate (/P).



Institutional swivel castor brackets with a load capacity of up to 125 kg

Housings made of polished stainless steel. Swivel head with double ball bearing and riveted kingpin. Available with either plate (P) or bolt hole (R) fitting. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.

PE·VO·LON®
stainless steel industrial castors



Series VB/1

Series VL/1


Article code	mm	mm	mm	mm	mm	mm	mm	kg
VL 080/35/1 L	80	35	108	105 x 85	80 x 60	9	38	150
VL 100/34/1 L	100	34	128	105 x 85	80 x 60	9	38	150
VL 125/40/1 L	125	40	155	105 x 85	80 x 60	9	45	150
VL 125/40/1	125	40	161	135 x 110	105 x 80	11	55	300
VL 150/42/1	150	42	192	135 x 110	105 x 80	11	55	400
VL 160/40/1	160	40	197	135 x 110	105 x 80	11	55	400
VL 200/50/1	200	50	237	135 x 110	105 x 80	11	55	400

Stainless steel industrial swivel castors with PEVOLON® wheels (plain bearing)

Wheels series B with plain bearing (/1), see page 39.

Article code	mm	mm	mm	mm	mm	mm	mm	kg
VB 080/35/1 L	80	35	108	105 x 85	80 x 60	9	150	
VB 100/34/1 L	100	34	128	105 x 85	80 x 60	9	150	
VB 125/40/1 L	125	40	155	105 x 85	80 x 60	9	150	
VB 125/40/1	125	40	161	135 x 110	105 x 80	11	300	
VB 150/42/1	150	42	192	135 x 110	105 x 80	11	400	
VB 160/40/1	160	40	197	135 x 110	105 x 80	11	400	
VB 200/50/1	200	50	237	135 x 110	105 x 80	11	400	

Stainless steel industrial fixed castors



Industrial swivel castor brackets with a load capacity of up to 400 kg

Housings made of pressed stainless steel. Swivel head with double ball bearings, dust and splash proof, with riveted kingpin. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.

ALLSTOP total locking device Code: VLF...	single bolt hole Code: VL.../...R	single bolt hole/total lock Code: VLF.../...R
stem fitting Code: VLZ...	stem fitting/total locking device Code: VLFZ...	

PE·VO·LON®
stainless steel industrial castors



Series VB/3

Series VL/3

Article code	mm	mm	mm	mm	mm	mm	mm	kg
VL 080/30/3R L	80	30	108	105 x 85	80 x 60	9	38	150
VL 100/34/3R L	100	34	128	105 x 85	80 x 60	9	38	150
VL 125/40/3R L	125	40	155	105 x 85	80 x 60	9	45	150
VL 125/40/3R	125	40	161	135 x 110	105 x 80	11	55	300
VL 150/42/3R	150	42	192	135 x 110	105 x 80	11	55	225
VL 160/40/3R	160	40	197	135 x 110	105 x 80	11	55	400
VL 200/50/3R	200	50	237	135 x 110	105 x 80	11	55	400

Stainless steel industrial swivel castors with PEVOLON® wheels (stainless roller bearing)

Wheels series B with stainless roller bearing (/3R).

Article code	mm	mm	mm	mm	mm	mm	mm	kg
VB 080/30/3R L	80	30	108	105 x 85	80 x 60	9	150	
VB 100/34/3R L	100	34	128	105 x 85	80 x 60	9	150	
VB 125/40/3R L	125	40	155	105 x 85	80 x 60	9	150	
VB 125/40/3R	125	40	161	135 x 110	105 x 80	11	300	
VB 150/42/3R	150	42	192	135 x 110	105 x 80	11	225	
VB 160/40/3R	160	40	197	135 x 110	105 x 80	11	400	
VB 200/50/3R	200	50	237	135 x 110	105 x 80	11	400	

Stainless steel industrial fixed castors













Industrial swivel castor brackets with a load capacity of up to 400 kg

Housings made of pressed stainless steel. Swivel head with double ball bearings, dust and splash proof, with riveted kingpin. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.











ALLSTOP total locking device Code: VLF...	single bolt hole Code: VL.../...R	single bolt hole/total lock Code: VLF.../...R
stem fitting Code: VLZ...	stem fitting/total locking device Code: VLFZ...	

PE·VO·LON®
stainless steel industrial castors




									
Article code	mm	mm	mm	mm	mm	mm	mm	mm	kg
WL NI/080/35/1 L	80	35	118	105 x 85	80 x 60	9	40		300
WL NI/100/40/1 L	100	40	140	105 x 85	80 x 60	9	45		350
WL NI/100/50/1	100	50	148	135 x 110	105 x 80	11	50		600
WL NI/125/40/1 L	125	40	165	105 x 85	80 x 60	9	45		350
WL NI/125/50/1	125	50	178	135 x 110	105 x 80	11	50		700
WL NI/150/50/1	150	50	205	135 x 110	105 x 80	11	50		750
WL NI/200/50/1	200	50	250	135 x 110	105 x 80	11	55		750

Stainless steel industrial swivel castors with PEVOLON® wheels
Wheels series A with plain bearing (/1), see page 36.

									
Article code	mm	mm	mm	mm	mm	mm	mm	mm	kg
WB NI/080/35/1 L	80	35	118	105 x 85	80 x 60	9			300
WB NI/100/40/1 L	100	40	140	105 x 85	80 x 60	9			350
WB NI/100/50/1	100	50	148	135 x 110	105 x 80	11			600
WB NI/125/40/1 L	125	40	165	105 x 85	80 x 60	9			350
WB NI/125/50/1	125	50	178	135 x 110	105 x 80	11			700
WB NI/150/50/1	150	50	205	135 x 110	105 x 80	11			750
WB NI/200/50/1	200	50	250	135 x 110	105 x 80	11			750

Stainless steel industrial fixed castors













Industrial swivel castor brackets with a load capacity of up to 750 kg
Housings made of strong pressed stainless steel. Swivel head with double ball bearings, dust and splash proof. Without kingpin. With grease nipple. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.



PE·VO·THAN®
stainless steel industrial castors




									
Article code	mm	mm	mm	mm	mm	mm	mm	mm	kg
31 PU NI/080/35/1 L	80	35	108	105 x 85	80 x 60	9	38		100
31 PU NI/100/34/1 L	100	34	128	105 x 85	80 x 60	9	38		140
31 PU NI/125/37/1 L	125	37	155	105 x 85	80 x 60	9	45		180
31 PU NI/150/45/1	150	45	192	135 x 110	105 x 80	11	55		225
31 PU NI/160/50/1	160	50	197	135 x 110	105 x 80	11	55		250
31 PU NI/200/50/1	200	50	237	135 x 110	105 x 80	11	55		400

Stainless steel industrial swivel castors with PEVOTHAN® wheels (plain bearing)
Wheels series 89 PU with plain bearing (/1), see page 51.

									
Article code	mm	mm	mm	mm	mm	mm	mm	mm	kg
32 PU NI/080/35/1 L	80	35	108	105 x 85	80 x 60	9			100
32 PU NI/100/34/1 L	100	34	128	105 x 85	80 x 60	9			140
32 PU NI/125/37/1 L	125	37	155	105 x 85	80 x 60	9			180
32 PU NI/150/45/1	150	45	192	135 x 110	105 x 80	11			225
32 PU NI/160/50/1	160	50	197	135 x 110	105 x 80	11			250
32 PU NI/200/50/1	200	50	237	135 x 110	105 x 80	11			400


Stainless steel industrial fixed castors




Industrial swivel castor brackets with a load capacity of up to 400 kg
Housings made of pressed stainless steel. Swivel head with double ball bearings, dust and splash proof, with riveted kingpin. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.




PE·VO·THAN®
stainless steel industrial castors

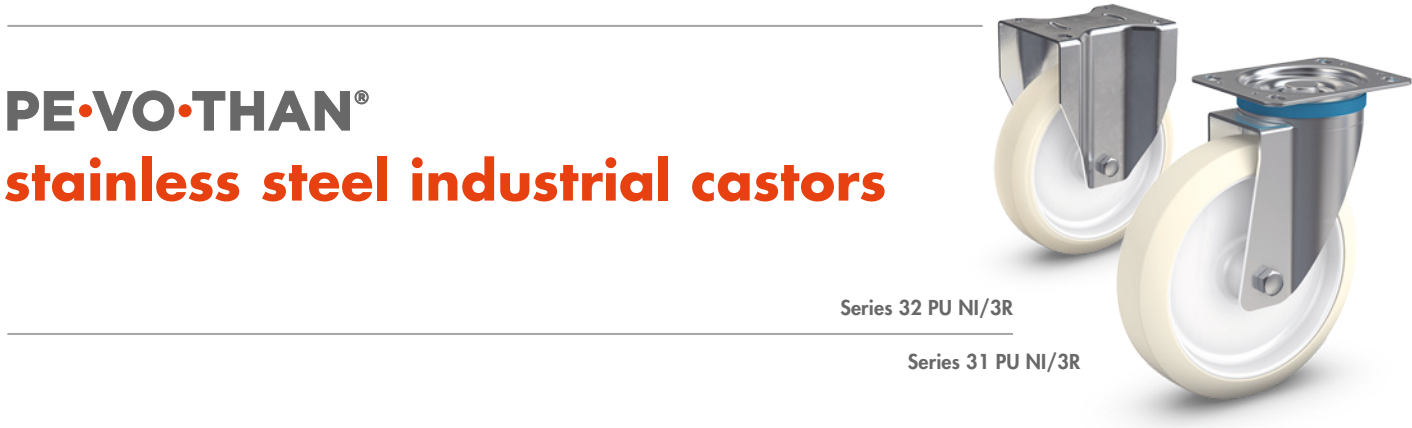


	Article code	mm	mm	mm	mm	mm	mm	mm	kg
	31 PU NI/080/35/3R L	80	35	108	105 x 85	80 x 60	9	38	100
	31 PU NI/100/34/3R L	100	34	128	105 x 85	80 x 60	9	38	140
	31 PU NI/125/37/3R L	125	37	155	105 x 85	80 x 60	9	45	180
	31 PU NI/150/45/3R	150	45	192	135 x 110	105 x 80	11	55	225
	31 PU NI/160/50/3R	160	50	197	135 x 110	105 x 80	11	55	250
	31 PU NI/200/50/3R	200	50	237	135 x 110	105 x 80	11	55	400

	Article code	mm	mm	mm	mm	mm	mm	mm	kg
	32 PU NI/080/35/3R L	80	35	108	105 x 85	80 x 60	9	38	100
	32 PU NI/100/34/3R L	100	34	128	105 x 85	80 x 60	9	38	140
	32 PU NI/125/37/3R L	125	37	155	105 x 85	80 x 60	9	45	180
	32 PU NI/150/45/3R	150	45	192	135 x 110	105 x 80	11	55	225
	32 PU NI/160/50/3R	160	50	197	135 x 110	105 x 80	11	55	250
	32 PU NI/200/50/3R	200	50	237	135 x 110	105 x 80	11	55	400


ALLSTOP total locking device
Code: 31 F PU NI/...




single bolt hole
Code: 31 PU NI/...R




single bolt hole/total lock
Code: 31 F PU NI/...R



stem fitting
Code: 31 Z PU NI/...




stem fitting/total locking device
Code: 31 FZ PU NI/...



Stainless steel industrial swivel castors with PEVOTHAN® wheels (stainless roller bearing)

Wheels series 89 PU with stainless roller bearing (/3R), see page 51.

Stainless steel industrial fixed castors





Industrial swivel castor brackets with a load capacity of up to 400 kg

Housings made of pressed stainless steel. Swivel head with double ball bearings, dust and splash proof, with riveted kingpin. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.


Stainless steel industrial castors




	Article code	mm	mm	mm	mm	mm	mm	mm	kg
	31 PS NI/080/35/1 L	80	35	108	105 x 85	80 x 60	9	38	80
	31 PS NI/100/34/1 L	100	34	128	105 x 85	80 x 60	9	38	100
	31 PS NI/125/37/1 L	125	37	155	105 x 85	80 x 60	9	45	120
	31 PS NI/150/45/1	150	45	192	135 x 110	105 x 80	11	55	180
	31 PS NI/160/50/1	160	50	197	135 x 110	105 x 80	11	55	200
	31 PS NI/200/50/1	200	50	237	135 x 110	105 x 80	11	55	300

	Article code	mm	mm	mm	mm	mm	mm	mm	kg
	32 PS NI/080/35/1 L	80	35	108	105 x 85	80 x 60	9	38	80
	32 PS NI/100/34/1 L	100	34	128	105 x 85	80 x 60	9	38	100
	32 PS NI/125/37/1 L	125	37	155	105 x 85	80 x 60	9	45	120
	32 PS NI/150/45/1	150	45	192	135 x 110	105 x 80	11	55	180
	32 PS NI/160/50/1	160	50	197	135 x 110	105 x 80	11	55	200
	32 PS NI/200/50/1	200	50	237	135 x 110	105 x 80	11	55	300


ALLSTOP total locking device
Code: 31 F PS NI/...




single bolt hole
Code: 31 PS NI/...R




single bolt hole/total lock
Code: 31 F PS NI/...R



stem fitting
Code: 31 Z PS NI/...



stem fitting/total locking device
Code: 31 FZ PS NI/...



Stainless steel industrial swivel castors with thermoplastic rubber wheels (plain bearing)

Wheels series 89 PS with plain bearing (/1), see page 61.


Stainless steel industrial fixed castors



Industrial swivel castor brackets with a load capacity of up to 300 kg

Housings made of pressed stainless steel. Swivel head with double ball bearings, dust and splash proof, with riveted kingpin. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.

Stainless steel industrial castors

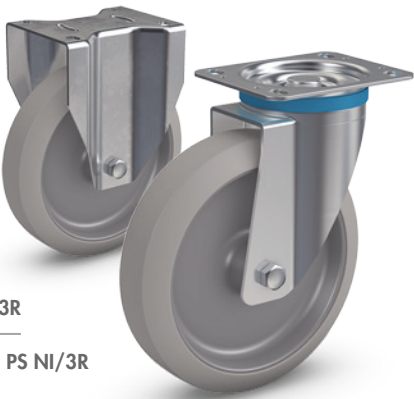

Series 32 PS NI/3R

Series 31 PS NI/3R


								
Article code	mm	mm	mm	mm	mm	mm	mm	kg
31 PS NI/080/35/3R L	80	35	108	105 x 85	80 x 60	9	38	80
31 PS NI/100/34/3R L	100	34	128	105 x 85	80 x 60	9	38	100
31 PS NI/125/37/3R L	125	37	155	105 x 85	80 x 60	9	45	120
31 PS NI/150/45/3R	150	45	192	135 x 110	105 x 80	11	55	180
31 PS NI/160/50/3R	160	50	197	135 x 110	105 x 80	11	55	200
31 PS NI/200/50/3R	200	50	237	135 x 110	105 x 80	11	55	300

Stainless steel industrial swivel castors with thermoplastic rubber wheels (stainless roller bearing)

Wheels series 89 PS with stainless roller bearing (/3R), see page 61.

								
Article code	mm	mm	mm	mm	mm	mm	mm	kg
32 PS NI/080/35/3R L	80	35	108	105 x 85	80 x 60	9	80	
32 PS NI/100/34/3R L	100	34	128	105 x 85	80 x 60	9	100	
32 PS NI/125/37/3R L	125	37	155	105 x 85	80 x 60	9	120	
32 PS NI/150/45/3R	150	45	192	135 x 110	105 x 80	11	180	
32 PS NI/160/50/3R	160	50	197	135 x 110	105 x 80	11	200	
32 PS NI/200/50/3R	200	50	237	135 x 110	105 x 80	11	300	

Stainless steel industrial fixed castors



Industrial swivel castor brackets with a load capacity of up to 300 kg

Housings made of pressed stainless steel. Swivel head with double ball bearings, dust and splash proof, with riveted kingpin. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.

ALLSTOP total locking device
Code: 31 F PS NI/...



single bolt hole
Code: 31 PS NI/...R



single bolt hole/total lock
Code: 31 F PS NI/...R



stem fitting
Code: 31 Z PS NI/...



stem fitting/total locking device
Code: 31 FZ PS NI/...












PE·VO·THAN® stainless steel industrial castors



Series WB PU NI

Series WL PU NI


								
Article code	mm	mm	mm	mm	mm	mm	mm	kg
WL PU NI/080/35/1 L	80	35	118	105 x 85	80 x 60	9	40	120
WL PU NI/100/40/1 L	100	40	140	105 x 85	80 x 60	9	45	200
WL PU NI/125/45/1 L	125	45	165	105 x 85	80 x 60	9	45	250
WL PU NI/150/45/1	150	45	205	135 x 110	105 x 80	11	50	380
WL PU NI/200/50/1	200	50	250	135 x 110	105 x 80	11	55	500

Stainless steel industrial swivel castors with PEVOTHAN® wheels

Wheels series 87 PU with plain bearing (/1), see page 52.

								
Article code	mm	mm	mm	mm	mm	mm	mm	kg
WB PU NI/080/35/1 L	80	35	118	105 x 85	80 x 60	9	120	
WB PU NI/100/40/1 L	100	40	140	105 x 85	80 x 60	9	200	
WB PU NI/125/45/1 L	125	45	165	105 x 85	80 x 60	9	250	
WB PU NI/150/45/1	150	45	205	135 x 110	105 x 80	11	380	
WB PU NI/200/50/1	200	50	250	135 x 110	105 x 80	11	500	

Stainless steel industrial fixed castors




Industrial swivel castor brackets with a load capacity of up to 500 kg







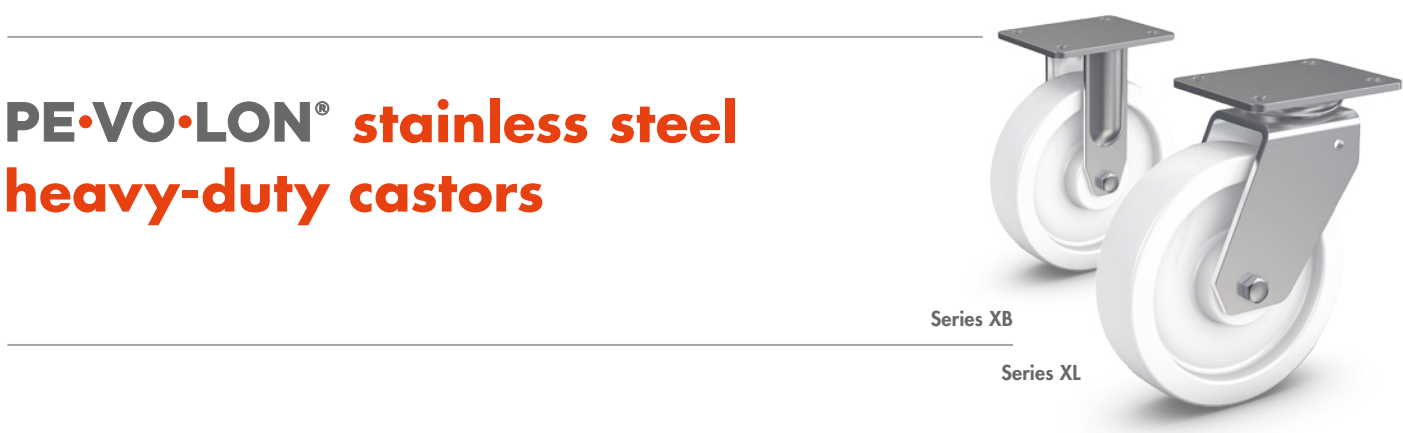


Housings made of strong pressed stainless steel. Swivel head with double ball bearings, dust and splash proof. Without kingpin. With grease nipple. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.

ALLSTOP total locking device
Code: WLF PU NI/...











PE·VO·LON® stainless steel heavy-duty castors




								
Article code	mm	mm	mm	mm	mm	mm	mm	kg
XL 100/40/1	100	40	133	119 x 101	84 x 72	11	41	450
XL 125/50/1	125	50	164	140 x 110	105 x 80	13	50	550
XL 150/50/1	150	50	188	140 x 110	105 x 80	13	55	550
XL 200/50/1	200	50	242	140 x 110	105 x 80	13	58	550

Stainless steel heavy-duty swivel castors with PEVOLON® wheels

With wheels series A with plain bearing (/1), see page 36.


							
Article code	mm	mm	mm	mm	mm	mm	kg
XB 100/40/1	100	40	133	119 x 101	84 x 72	11	450
XB 125/50/1	125	50	164	140 x 110	105 x 80	13	550
XB 150/50/1	150	50	188	140 x 110	105 x 80	13	550
XB 200/50/1	200	50	242	140 x 110	105 x 80	13	550

Stainless steel heavy-duty industrial fixed castors












Heavy-duty swivel castor brackets with a load capacity of up to 550 kg

Housings made of welded stainless steel. Swivel head with double ball bearings, dust and splash proof. Without kingpin. With grease nipple. ALLSTOP total locking device on the non-trailing side of the housing, blocks rolling and swivel motion simultaneously.











PE·VO·LON® stainless steel industrial castors




								
Article code	mm	mm	mm	mm	mm	mm	mm	kg
TL NI/125/50/1	125	50	176	140 x 110	105 x 80	12	45	700
TL NI/160/50/1	160	50	212	140 x 110	105 x 80	12	52	850
TL NI/200/50/1	200	50	250	140 x 110	105 x 80	12	58	1.200

Stainless steel heavy-duty industrial swivel castors with PEVOLON® wheels

Wheels series A with plain bearing (/1), see page 36.

							
Article code	mm	mm	mm	mm	mm	mm	kg
TB NI/125/50/1	125	50	176	140 x 110	105 x 80	12	700
TB NI/160/50/1	160	50	212	140 x 110	105 x 80	12	850
TB NI/200/50/1	200	50	250	140 x 110	105 x 80	12	1.200


Stainless steel heavy-duty industrial fixed castors



Industrial swivel castor brackets with a load capacity of up to 1,200 kg

Housings made of extra strong pressed stainless steel. Swivel head with double ball bearing. Bearing shells made of hardened steel. Kingpin bolted and secured. ALLSTOP total locking device on the non-trailing side of the housing, blocks rolling and swivel motion simultaneously.



	Clamping range min	Clamping range max
Article code	mm	mm
69 K-R 20 NI	19,0	21,5
69 K-R 22 NI	21,5	24,0
69 K-R 24 NI	24,0	27,0
69 K-R 28 NI	27,0	30,0
69 K-R 32 NI	31,0	35,0
69 K-V 22 NI	21,5	24,0
69 K-V 25 NI	24,0	27,0
69 K-V 27 NI	27,0	30,0
69 K-V 32 NI	32,0	35,0
69 K-V 37 NI	36,0	40,0

Fixing devices for institutional swivel castors with bolt hole fitting

Plastic expander for circular tubes (-R) or square tubes (-V).

