


Institutional wheels and castors

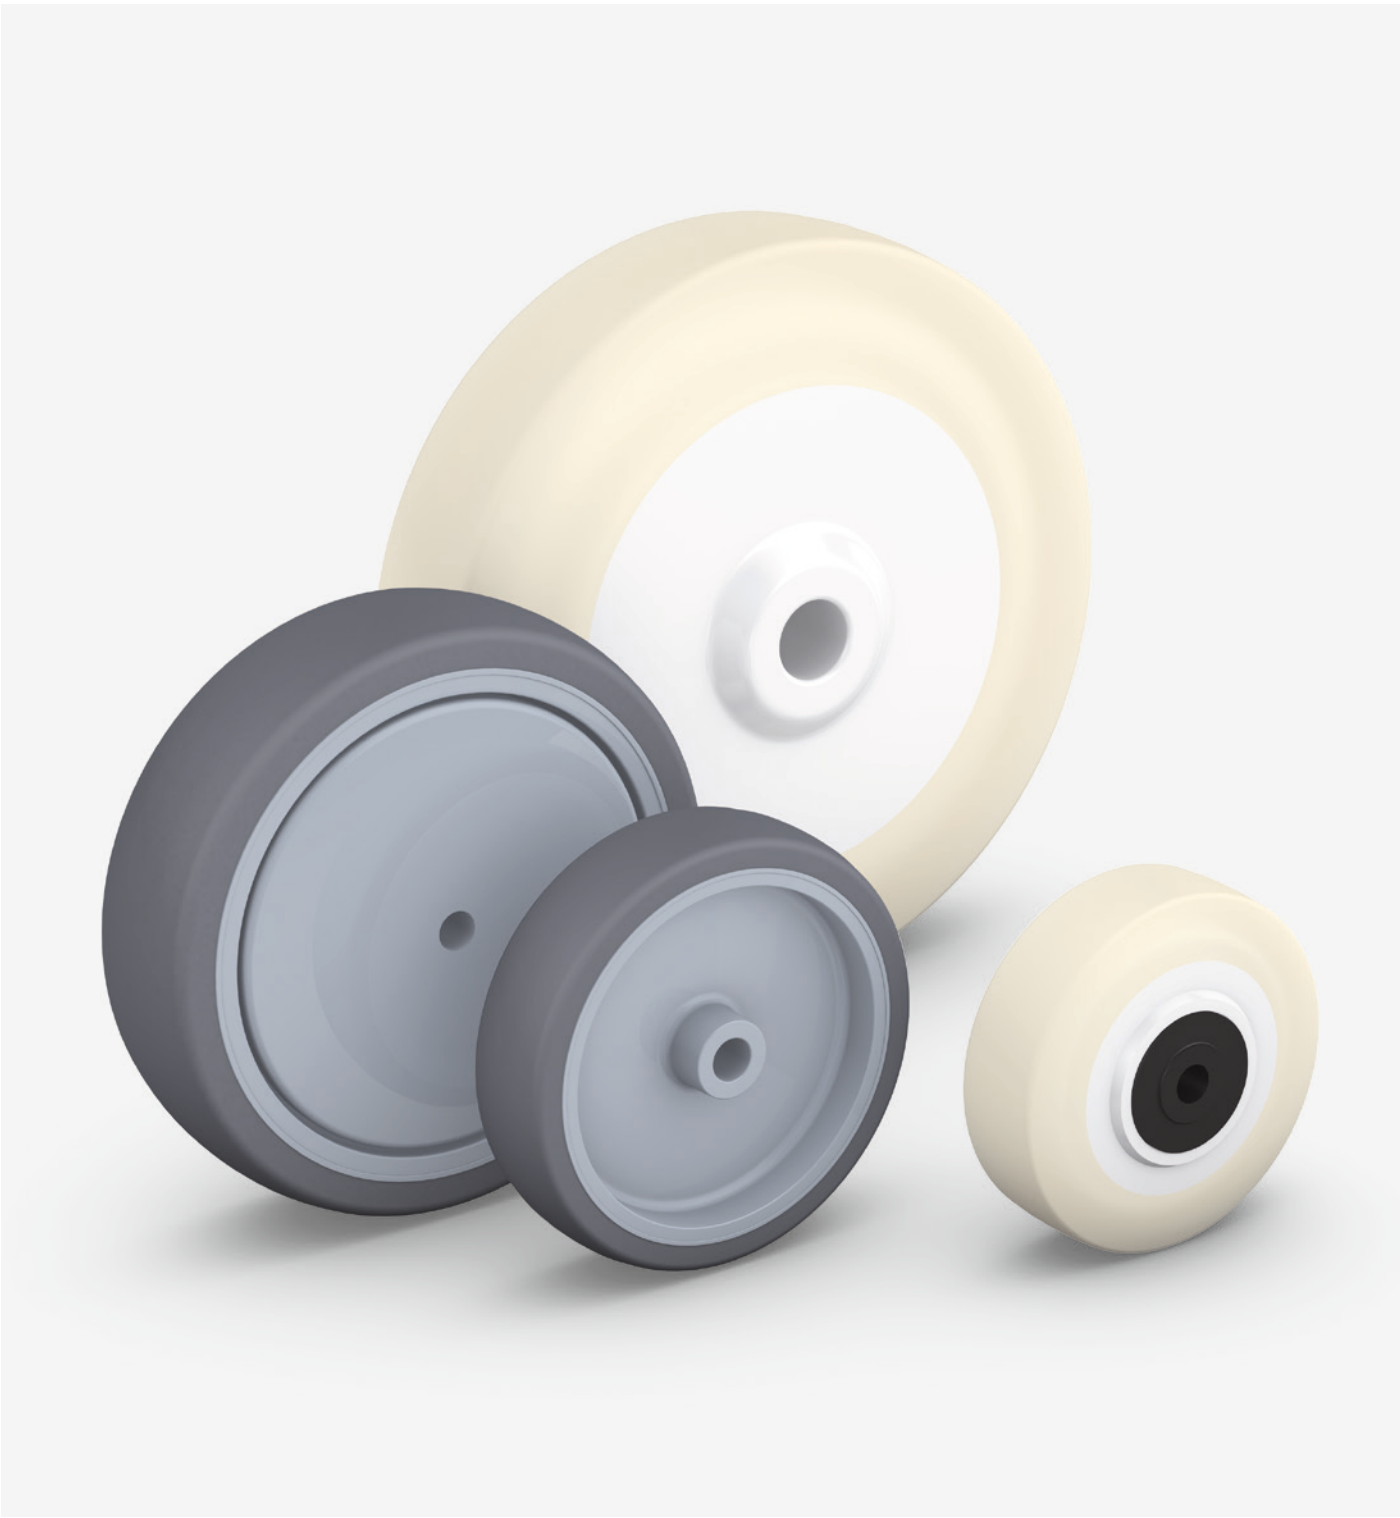

Institutional wheels and castors product overview

Institutional WHEELS AND CASTORS

Our extensive range of institutional castors completes our castor range for in-plant transportation.

The high-quality materials we use insure a long service life.

A wide range of mounting possibilities enable flexible installation.



Series 85
Series 85 PU
40 - 125 kg
Page 130



Series 67 /P
Series 68 /P
40 - 110 kg
Page 132



Series 67 /R
40 - 110 kg
Page 133



Series 69 K-R
Series 69 K-V
Page 133










Series 67 PU
Series 68 PU
40 - 125 kg
Page 134

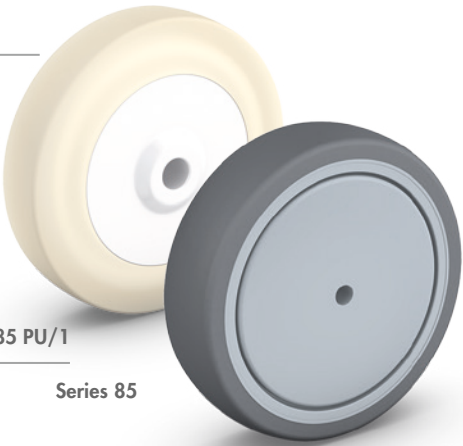







Series 67 D
Series 67 D PU
60 - 80 kg
Page 135

Institutional wheels



					
Article code	mm	mm	mm	mm	kg
85/050/018/1/6	50	18	21	6	40
85/050/018/1/8	50	18	22	8	40
85/075/024/1/8	75	24	27	8	60
85/100/032/1/12	100	32	39	12	100
85/125/032/1/12	125	32	39	12	100
85/150/032/1/12	150	32	35	12	110
85/050/018/5/6 FAD	50	18	22	6	40
85/075/024/5/6 FAD	75	24	28	6	60
85/100/032/5/8 FAD	100	32	36	8	100
85/150/032/5/8 FAD	150	32	36	8	110
85/075/030/5R/8 FAD	75	30	40	8	60
85/100/032/5R/8 FAD	100	32	36	8	100
85/125/032/5R/8 FAD	125	32	36	8	100
85/150/032/5R/8 FAD	150	32	36	8	110

FAD = thread guard

					
Article code	mm	mm	mm	mm	kg
85 PU/050/018/1/8	50	18	22	8	40
85 PU/075/024/1/8	75	24	28	8	60
85 PU/100/030/1/12	100	30	39	12	100
85 PU/125/030/1/12	125	30	39	12	125
85 PU/075/024/5/8	75	24	28	8	60
85 PU/100/030/5/8	100	30	36	8	100
85 PU/125/030/5/8	125	30	36	8	125
85 PU/075/024/5R/8	75	24	28	8	60
85 PU/100/030/5R/8	100	30	36	8	100
85 PU/125/030/5R/8	125	30	36	8	125

Thermoplastic rubber wheels with plastic rim

Plastic rim with non-marking thermoplastic rubber tyre with plain bearing (/1), ball bearing (/5) or stainless ball bearing (/5R).

PEVOTHAN® wheels

PEVOLON® rim with high-quality thermoplastic polyurethane tread with plain bearing (/1), ball bearings (/5) or stainless ball bearings (/5R).

Institutional wheels

