








Institutional wheels

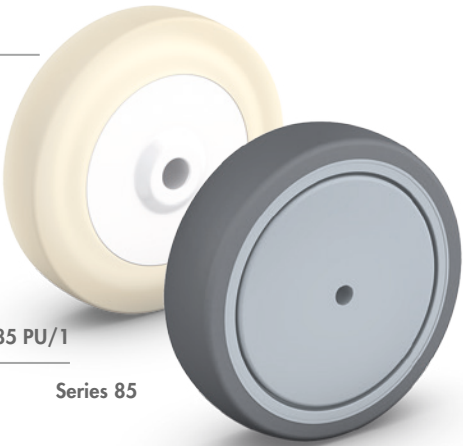







Series 85 PU/1

Series 85

					
Article code	mm	mm	mm	mm	kg
85/050/018/1/6	50	18	21	6	40
85/050/018/1/8	50	18	22	8	40
85/075/024/1/8	75	24	27	8	60
85/100/032/1/12	100	32	39	12	100
85/125/032/1/12	125	32	39	12	100
85/150/032/1/12	150	32	35	12	110
85/050/018/5/6 FAD	50	18	22	6	40
85/075/024/5/6 FAD	75	24	28	6	60
85/100/032/5/8 FAD	100	32	36	8	100
85/150/032/5/8 FAD	150	32	36	8	110
85/075/030/5R/8 FAD	75	30	40	8	60
85/100/032/5R/8 FAD	100	32	36	8	100
85/125/032/5R/8 FAD	125	32	36	8	100
85/150/032/5R/8 FAD	150	32	36	8	110

FAD = thread guard

					
Article code	mm	mm	mm	mm	kg
85 PU/050/018/1/8	50	18	22	8	40
85 PU/075/024/1/8	75	24	28	8	60
85 PU/100/030/1/12	100	30	39	12	100
85 PU/125/030/1/12	125	30	39	12	125
85 PU/075/024/5/8	75	24	28	8	60
85 PU/100/030/5/8	100	30	36	8	100
85 PU/125/030/5/8	125	30	36	8	125
85 PU/075/024/5R/8	75	24	28	8	60
85 PU/100/030/5R/8	100	30	36	8	100
85 PU/125/030/5R/8	125	30	36	8	125


Thermoplastic rubber wheels with plastic rim

Plastic rim with non-marking thermoplastic rubber tyre with plain bearing (/1), ball bearing (/5) or stainless ball bearing (/5R).

PEVOTHAN® wheels

PEVOLON® rim with high-quality thermoplastic polyurethane tread with plain bearing (/1), ball bearings (/5) or stainless ball bearings (/5R).

Institutional wheels

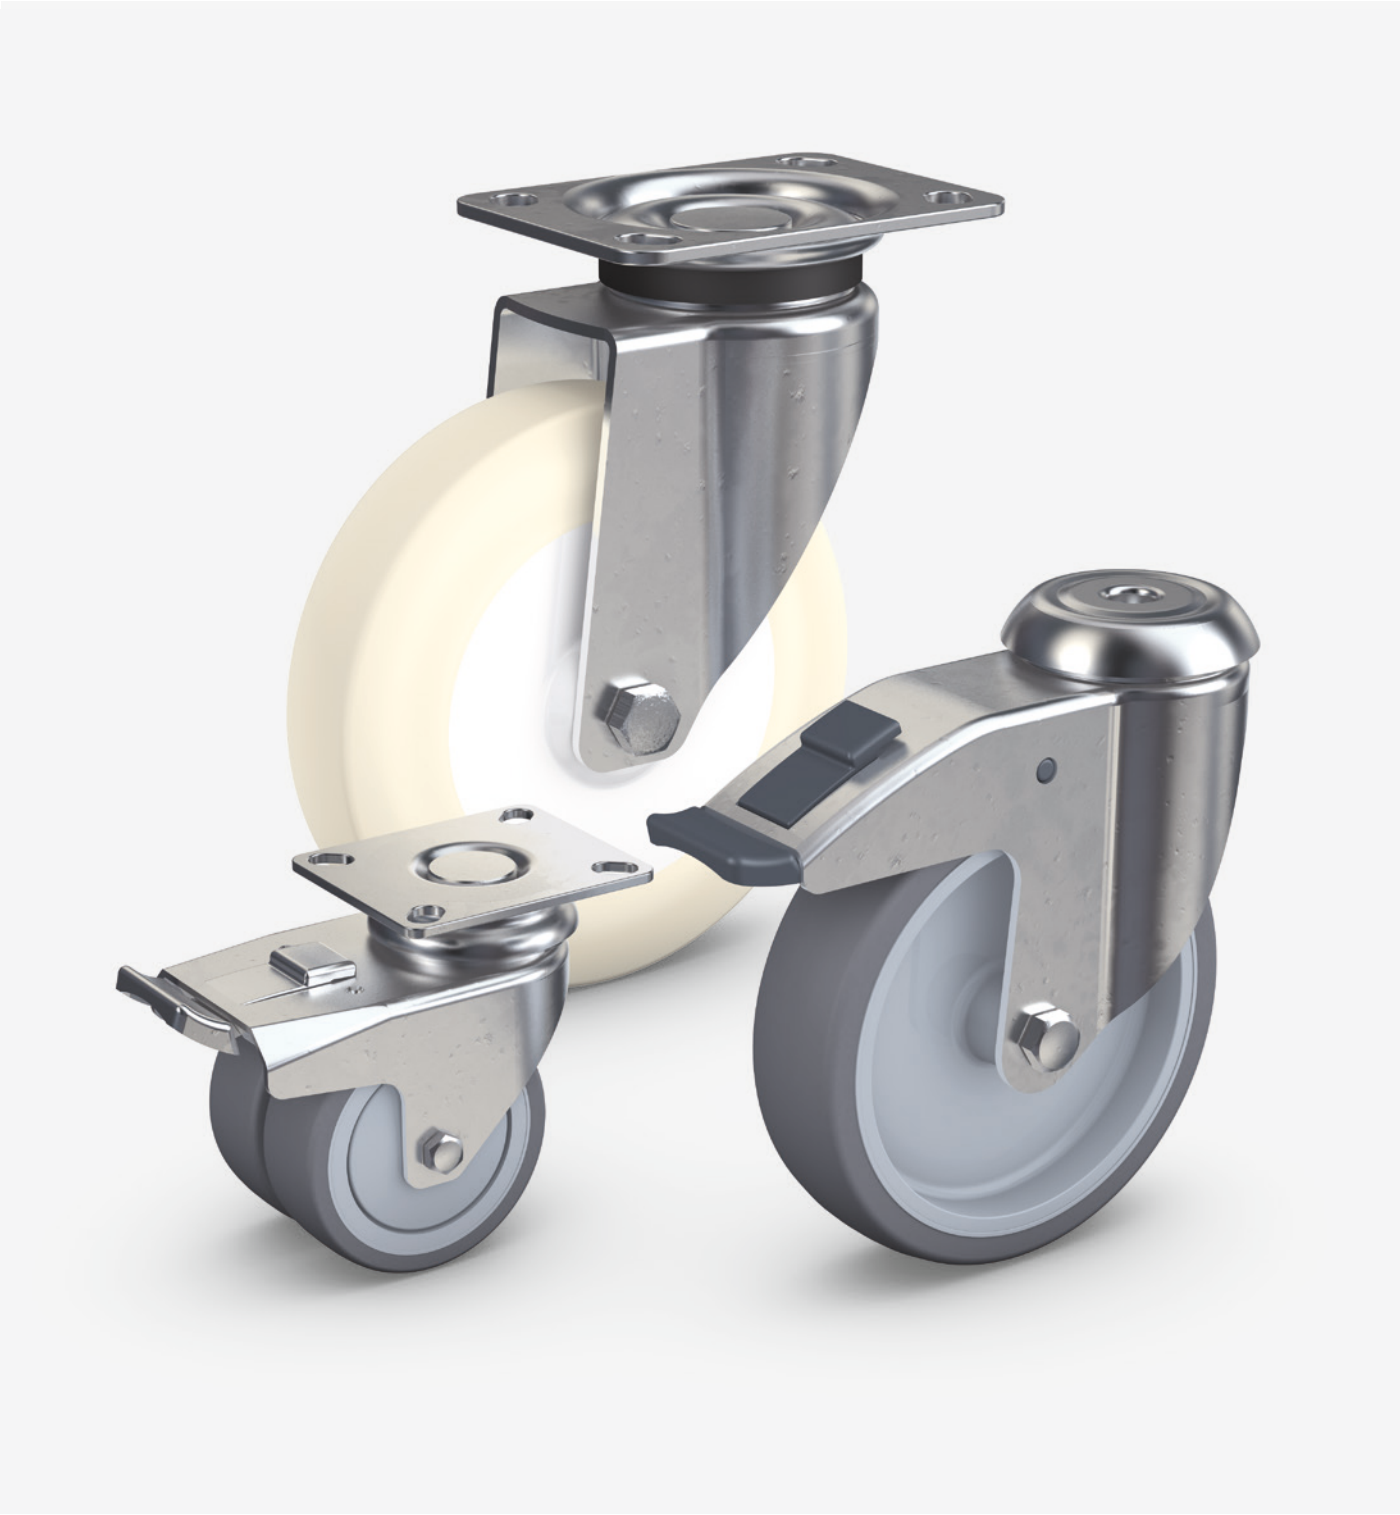










Institutional wheels












Series 68 /1/P

Series 67 /1/P


								
Article code	mm	mm	mm	mm	mm	mm	mm	kg
67/050/18/1/P	50	18	69	60 x 60	48 x 48/38 x 38	6	23	40
67/075/25/1/P	75	25	100	60 x 60	48 x 48/38 x 38	6	30	60
67/100/32/1/P	100	32	135	95 x 70	76 x 52/72 x 45	9	43	90
67/125/32/1/P	125	32	160	95 x 70	76 x 52/72 x 45	9	41	110
67/150/32/1/P	150	32	185	95 x 70	76 x 52/72 x 45	9	36	110
67/050/18/5/P FAD	50	18	69	60 x 60	46 x 46/40 x 40	6	25	40
67/075/25/5/P FAD	75	25	100	60 x 60	48 x 48/38 x 38	6	30	60
67/100/32/5/P FAD	100	32	135	95 x 70	76 x 52/72 x 45	9	43	90
67/125/32/5/P FAD	125	32	160	95 x 70	76 x 52/72 x 45	9	41	110
67/150/32/5/P FAD	150	32	185	95 x 70	76 x 52/72 x 45	9	36	110

Institutional swivel castors with thermoplastic rubber wheels

Wheels series 85 with plain bearing (/1) or ball bearings with thread guards (/5/P FAD), see page 130.

								
Article code	mm	mm	mm	mm	mm	mm	mm	kg
68/050/18/1/P	50	18	69	60 x 60	48 x 48/38 x 38	6	23	40
68/075/25/1/P	75	25	100	60 x 60	48 x 48/38 x 38	6	30	60
68/100/32/1/P	100	32	135	95 x 77	76 x 52/72 x 45	9	43	90
68/125/32/1/P	125	32	160	95 x 77	76 x 52/72 x 45	9	41	110
68/150/32/1/P	150	32	185	95 x 77	76 x 52/72 x 45	9	36	110
68/050/18/5/P FAD	50	18	70	60 x 60	48 x 48/38 x 38	6	25	40
68/075/25/5/P FAD	75	25	100	60 x 60	48 x 48/38 x 38	6	30	60
68/100/32/5/P FAD	100	32	135	95 x 77	76 x 52/72 x 45	9	43	90
68/125/32/5/P FAD	125	32	160	95 x 77	76 x 52/72 x 45	9	41	110
68/150/32/5/P FAD	150	32	185	95 x 77	76 x 52/72 x 45	9	36	110

Institutional fixed castors



Institutional swivel castor brackets with a load capacity of up to 110 kg

Housings made of pressed steel, zinc and chromated. Swivel head with double ball bearing and riveted kingpin. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.








ALLSTOP total locking device
Code: 67 F/...P



Institutional wheels




Series 67 /1/R

						
Article code	mm	mm	mm	mm	mm	kg
67/050/18/1/R	50	18	71	10	25	40
67/075/25/1/R	75	25	98	10	30	60
67/100/32/1/R	100	32	135	12	38	90
67/125/32/1/R	125	32	160	12	41	110
67/150/32/1/R	150	32	185	12	36	110
67/050/18/5/R FAD	50	18	71	10	25	40
67/075/25/5/R FAD	75	25	98	10	30	60
67/100/32/5/R FAD	100	32	135	12	38	90
67/125/32/5/R FAD	125	32	160	12	41	110
67/150/32/5/R FAD	150	32	185	12	36	110

Institutional swivel castors with thermoplastic rubber wheels

Wheels series 85 with plain bearing (/1) or ball bearings with thread guards (/5/R FAD), see page 130.




Institutional swivel castor brackets with a load capacity of up to 110 kg

Housings made of pressed steel, zinc and chromated. Swivel head with double ball bearings and riveted kingpin. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.


ALLSTOP total locking device
Code: 67 F/...R



	Clamping range min mm	Clamping range max mm
Article code		
69 K-R 17	16,9	17,8
69 K-R 20	19,0	21,5
69 K-R 22	21,5	24,0
69 K-R 24	24,0	27,0
69 K-R 28	27,0	30,0
69 K-R 32	31,0	35,0
69 K-V 17	16,6	18,7
69 K-V 22	21,5	24,0
69 K-V 25	24,0	27,0
69 K-V 27	27,0	30,0
69 K-V 32	32,0	35,0
69 K-V 37	36,0	40,0

Fixing devices for institutional swivel castors with bolt hole fitting

Plastic expander for circular tubes (-R) or square tubes (-V).



Series 69 K











Institutional wheels













Series 68 PU

Series 67 PU/R

Series 67 PU

										
Article code	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
67 PU/050/18/1/P	50	18	69	60 x 60	48 x 48/38 x 38	6	–	21	40	
67 PU/075/24/1/P	75	24	100	60 x 60	48 x 48/38 x 38	6	–	30	60	
67 PU/100/30/1/P	100	30	135	95 x 70	76 x 52/72 x 45	9	–	41	100	
67 PU/125/30/1/P	125	30	160	95 x 70	76 x 52/72 x 45	9	–	39	125	
67 PU/075/24/5/P	75	24	100	60 x 60	48 x 48/38 x 38	6	–	30	60	
67 PU/100/30/5/P	100	30	135	95 x 70	76 x 52/72 x 45	9	–	41	100	
67 PU/125/30/5/P	125	30	160	95 x 70	76 x 52/72 x 45	9	–	39	125	
67 PU/050/18/1/R	50	18	69	–	–	–	10	21	40	
67 PU/075/24/1/R	75	24	98	–	–	–	10	30	60	
67 PU/100/30/1/R	100	30	132	–	–	–	12	41	100	
67 PU/125/30/1/R	125	30	160	–	–	–	12	39	125	
67 PU/075/24/5/R	75	24	98	–	–	–	10	30	60	
67 PU/100/30/5/R	100	30	132	–	–	–	12	41	100	
67 PU/125/30/5/R	125	30	160	–	–	–	12	39	125	

									
Article code	mm	mm	mm	mm	mm	mm	mm	mm	kg
68 PU/050/18/1/P	50	18	69	60 x 60	48 x 48/38 x 38	6	–	40	
68 PU/075/24/1/P	75	24	100	67 x 60	48 x 48/38 x 38	6	–	60	
68 PU/100/30/1/P	100	30	135	95 x 70	76 x 52/72 x 45	9	–	100	
68 PU/125/30/1/P	125	30	160	95 x 70	76 x 52/72 x 45	9	–	125	
68 PU/075/24/5/P	75	24	100	67 x 60	48 x 48/38 x 38	6	–	60	
68 PU/100/30/5/P	100	30	135	95 x 70	76 x 52/72 x 45	9	–	100	
68 PU/125/30/5/P	125	30	160	95 x 70	76 x 52/72 x 45	9	–	125	

ALLSTOP total locking device
Code: 67 F PU/...P



single bolt hole/total lock
Code: 67 F PU/...R




Institutional swivel castors with PEVOTHAN® wheels

Wheels series 85 PU with plain bearing (/1) or ball bearings (/5), see page 130.

Institutional fixed castors


Matching the swivel castors with top plate (/P).



Institutional swivel castor brackets with a load capacity of up to 125 kg





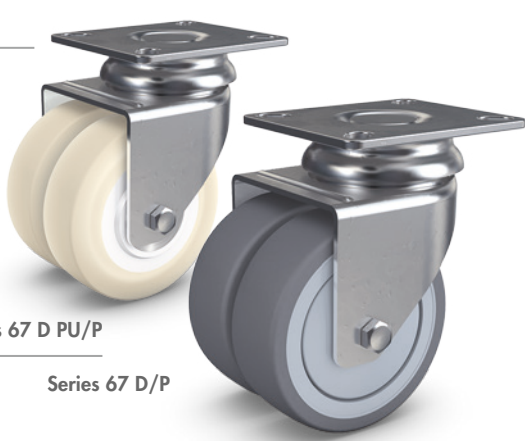






Housings made of pressed steel, zinc and chromated. Swivel head with double ball bearings and riveted kingpin. With either plate or bolt hole fitting. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.












Institutional wheels



Series 67 D PU/P

Series 67 D/P

										
Article code	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
67 D/050/18/1/P	50	18	72	60 x 60	48 x 48/38 x 38	6	–	30	60	
67 D/075/24/1/P	75	24	103	77 x 67	61 x 51/56 x 46	8	–	30	80	
67 D/050/18/5/P FAD	50	18	72	60 x 60	48 x 48/38 x 38	6	–	30	60	
67 D/075/24/5/P FAD	75	24	103	77 x 67	61 x 51/56 x 46	8	–	30	80	
67 D/050/18/1/R	50	18	72	–	–	–	10	30	60	
67 D/075/24/1/R	75	24	103	–	–	–	10	30	80	
67 D/075/24/5/R FAD	75	24	103	–	–	–	10	30	80	
67 D/050/18/5/R FAD	50	18	72	–	–	–	10	30	60	

										
Article code	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
67 D PU/050/18/1/P	50	18	72	60 x 60	48 x 48/38 x 38	6	–	30	60	
67 D PU/075/24/5/P	75	24	103	77 x 67	61 x 51/56 x 46	8	–	30	80	
67 D PU/050/18/1/R	50	18	72	–	–	–	10	30	80	
67 D PU/075/24/5/R	75	24	103	–	–	–	10	30	80	

Fixing devices for institutional swivel castors with bold hole fitting(/R), see page 133.


ALLSTOP total locking device
Code: 67 DF/...



ALLSTOP total locking device
Code: 67 DF PU/...



single bolt hole
Code: 67 D/.../...R



single bolt hole
Code: 67 D PU/.../...R



single bolt hole/total lock
Code: 67 DF/.../...R



single bolt hole/total lock
Code: 67 DF PU/.../...R




Institutional twin wheel swivel castors with thermoplastic rubber wheels

Wheels series 85 with plain bearing (/1) or ball bearings (/5), see page 130.

Institutional twin wheel swivel castors with PEVOTHAN® wheels

Wheels series 85 PU with plain bearing (/1) or ball bearings (/5), see page 130.



Institutional swivel castor brackets with a load capacity of up to 80 kg

Housings made of pressed steel, zinc and chromated. Swivel head with double ball race and riveted kingpin. With either plate or bolt hole fitting. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.