



INSTITUTIONAL





SERIES
32

POLYAMIDE 6 WHEELS





PAGE 286



SERIES
36

THERMOPLASTIC POLYURETHANE
WHEELS WITH POLYAMIDE 6 CENTRE




PAGE 292



SERIES
37

GREY RUBBER WHEELS WITH
POLYPROPYLENE CENTRE




PAGE 296




SERIES
51

THERMOPLASTIC RUBBER WHEELS
WITH POLYPROPYLENE CENTRE



PAGE 302



Description

Polyamide 6 solid wheels.

Hub with plain bore hole which directly houses the axle.

Uses

Recommended for use on catering and institutional trolleys having light carrying capacities.

Good resistance to chemical agents: not suitable on uneven flooring.

Examples of recommended applications: shop display units, trolleys for restaurants, furniture with light loads.

Environments of use

Suitable for industrial and institutional environments, also in presence of humidity and chemical agents.

WEAK ACIDS			
STRONG ACIDS			
WATER			
ALCOHOL			

WEAK BASES			
STRONG BASES			
HYDROCARBONS			
SOLVENTS			

For information on the compatibility of the component wheel materials with specific aggressive chemical substances, see table at page 36.








Floors

Suitable on tiles and resin-cement; not recommended on abrasive, unpaved floors or in presence of processing residues.


Not suitable on fragile floor or with obstacles along the path.













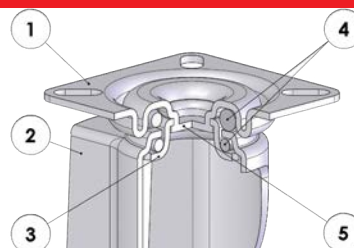


																		
mm	mm	kg	CODE	mm	mm	daN												
40	17	0.02	321102	8	21	30												
50	17	0.02	321104	8	22	40												
50	22	0.03	321105	8	28	50												
60	22	0.03	321106	8	28	60												










Institutional brackets




- 1) Plate: electrolytically galvanised steel plate
- 2) Fork: electrolytically galvanised steel plate
- 3) Ball race ring: electrolytically galvanised steel plate
- 4) Swivel actions: double ball ring with grease lubrication
- 5) King pin: integrated with the plate and cold-riveted

				2 pc package														
mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN						
40	17	0.12	324101	0.29	324001	61	42x42	30x30	5	24	30							
50	17	0.12	324102	0.31	324002	66	42x42	30x30	5	24	40							
60	22	0.22	324103	0.56	324003	83	60x60	45x45	6	21	60							



















																		
mm	mm	kg	CODE	mm	mm	mm	mm	daN										
40	17	0.10	325101	61	55x25	42	5	30										
50	17	0.10	325102	66	55x25	42	5	40										
60	22	0.20	325103	83	60x60	45x45	6	60										


Institutional brackets














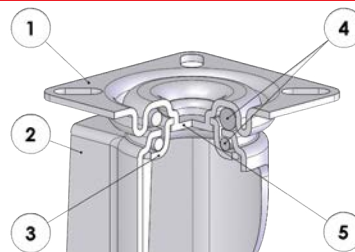




- 1) Plate: electrolytically galvanised steel plate
- 2) Fork: electrolytically galvanised steel plate
- 3) Ball race ring: electrolytically galvanised steel plate
- 4) Galvanised steel threaded stem
- 5) Swivel actions: double ball ring with grease lubrication

				2 pc package											
															
mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	mm	daN		
40	17	0.12	326101	0.26	326001	61	35	M10	20	24	30				
50	17	0.14	326102	0.28	326002	66	35	M10	20	24	40				
60	22	0.23	326103	0.47	326003	83	41	M12	24	21	60				


Institutional twin brackets for high carrying capacity


















- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Swivel actions: double ball ring with grease lubrication
 - 5) King pin: integrated with the plate and cold-riveted
- Available with total front foot brake


															
mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	mm	daN		
50	18+18	0.28	324302	0.33	328202	71	60x60	45x45	6	25.5	83	90			

Institutional twin brackets for high carrying capacity


















- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Swivel actions: double ball ring with grease lubrication
 - 5) King pin: integrated with the plate and cold-riveted
- Available with total front foot brake


														
mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	mm	mm	mm
50	18+18	0.26	323202	0.31	327202	71	55	10	25.5	83	90			









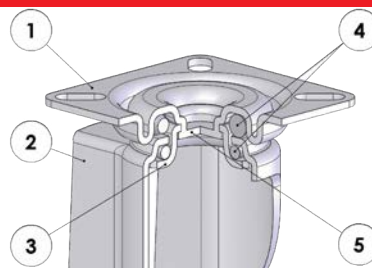











- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Galvanised steel threaded stem
 - 5) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake


														
mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	mm	mm	mm
50	18+18	0.29	326202	0.34	329202	71	52	M10	25	25.5	83	90		

Institutional brackets for high carrying capacity















- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Swivel actions: double ball ring with grease lubrication
 - 5) King pin: integrated with the plate and cold-riveted
- Available with total front foot brake


																	
																	
mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	mm	mm	daN			
50	30	0.27	324402	0.32	328302	71	60x60	45x45	6	25.5	83	80					
















- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Swivel actions: double ball ring with grease lubrication
 - 5) King pin: integrated with the plate and cold-riveted
- Available with total front foot brake

Available with total front foot brake											
											
mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	daN
50	30	0.24	323302	0.29	327302	71	55	10	25.5	83	80

Institutional brackets for high carrying capacity




- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Galvanised steel threaded stem
 - 5) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

														
mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN		
50	30	0.28	326302	0.33	329302	71	52	M10	25	25.5	83	80		

THERMOPLASTIC POLYURETHANE WHEELS WITH POLYAMIDE 6 CENTRE




40-60
mm



40-140
daN

3 km/h



-5 / +40
°C



Description

Tyre: thermoplastic polyurethane.

Centre: polyamide 6.

Hub with plain bore hole which directly houses the axle.

Uses

Suitable for use on different types of trolleys within the institutional sector, particularly in catering.

Good load carrying capacity in relation to small diameter wheels.

Resist well to frequent washing, making them suitable in environments where hygiene must be guaranteed.

Environments of use

Suitable for industrial and institutional environments, also in presence of humidity and chemical agents.

WEAK ACIDS			
STRONG ACIDS			
WATER			
ALCOHOL			

WEAK BASES			
STRONG BASES			
HYDROCARBONS			
SOLVENTS			

For information on the compatibility of the component wheel materials with specific aggressive chemical substances, see table at page 36.








Floors

Suitable on tiles and resin-cement; not recommended on abrasive, unpaved floors or in the presence of processing residues.


They do not damage fragile flooring and are also suitable in presence of small obstacles.










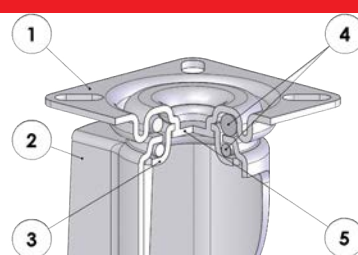










																		
mm	mm	kg	CODE	mm	mm	daN												
40	18	0.02	361101	8	21	40												
50	18	0.02	361102	8	22	55												
60	25	0.06	361103	8	28	70												









Institutional brackets




- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Swivel actions: double ball ring with grease lubrication
 - 5) King pin: integrated with the plate and cold-riveted
- Available with total front foot brake

															
mm	mm	kg	CODE	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN	
40	18	0.11	364301	0.11	365101	0.13	368101	59	42x42	32x32	5	23	76	40	
50	18	0.13	364302	0.12	365102	0.16	368102	66	55x55	40x40	6	24	76	55	
60	25	0.24	364303	0.21	365103	0.28	368103	83	60x60	45x45	6	21	84	70	






















		2 pc package																
mm	mm	kg	CODE	mm	mm	mm	mm	mm	daN									
40	18	0.30	324001	59	42x42	32x32	5	23	40									
50	18	0.34	324002	66	55x55	40x40	6	24	55									
60	25	0.56	324003	83	60x60	45x45	6	21	70									

Institutional brackets





















- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Swivel actions: double ball ring with grease lubrication
 - 5) King pin: integrated with the plate and cold-riveted
- Available with total front foot brake

																	
mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	daN						
40	18	0.10	363101	0.12	367101	59	35	10	23	76	40						
50	18	0.13	363102	0.13	367102	66	35	10	24	76	55						
60	25	0.24	363103	0.25	367103	83	42	13	21	84	70						



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Galvanised steel threaded stem
 - 5) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake


																	
mm	mm	kg	CODE	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	mm	daN		
40	18	0.12	366301	0.14	369101	0.34	366001	59	35	M10	20	23	76	40			
50	18	0.13	366302	0.16	369102	0.38	366002	66	35	M10	20	24	76	55			
60	25	0.24	366303	0.28	369103	0.62	366003	83	42	M12	25	21	84	70			

Options available to order




Different stem dimensions

Institutional twin brackets for high carrying capacity





- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Swivel actions: double ball ring with grease lubrication
 - 5) King pin: integrated with the plate and cold-riveted
- Available with total front foot brake

mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN		
50	18+18	0.30	364402	0.35	368202	71	60x60	45x45	6	25.5	83	140		



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Swivel actions: double ball ring with grease lubrication
 - 5) King pin: integrated with the plate and cold-riveted
- Available with total front foot brake

mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	daN			
50	18+18	0.27	363202	0.32	367202	71	55	10	25.5	83	140			

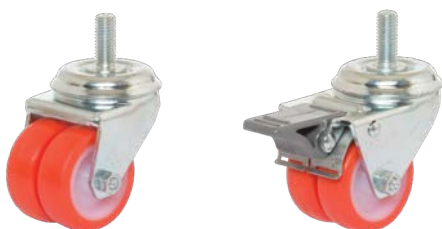

- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Galvanised steel threaded stem
 - 5) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN		
50	18+18	0.31	366402	0.36	369202	71	52	M10	25	25.5	83	140		

GREY RUBBER WHEELS WITH POLYPROPYLENE CENTRE



Description

Tyre: non-marking grey rubber, good elasticity.

Centre: polypropylene with metal thread-guards.

Hub with plain bore hole which directly houses the axle.

Uses

Suitable for use on different types of trolleys within the furniture and institutional sector.

They can also be used on fragile floors and in presence of small obstacles.

Example of recommended applications: shop display units and windows, low carrying capacity tool trolleys, supermarket trolleys.

Environments of use

Suitable for industrial and institutional environments, also in presence of humidity and medium-harsh chemical agents. Not suitable in the presence of organic solvents, chlorinated substances, hydrocarbons and mineral oils.

WEAK ACIDS				WEAK BASES		
STRONG ACIDS				STRONG BASES		
WATER				HYDROCARBONS		
ALCOHOL				SOLVENTS		

For information on the compatibility of the component wheel materials with specific aggressive chemical substances, see table at page 36.








Floors

Suitable on tiles and resin-cement; not recommended on abrasive, unpaved floors or in presence of processing residues.


They do not damage fragile floors and are also suitable in the presence of small obstacles.





















																		
mm	mm	kg	CODE	mm	mm	daN												
40	18	0.03	371100	8	21	30												
50	20	0.06	371101	8	22	35												
60	24	0.10	371102	8	28	50												
75	24	0.14	371203	8	28	55												
80	24	0.17	371103	8	28	55												
100	24	0.22	371104	8	28	60												
125	30	0.46	371105	10	35	80												


Institutional brackets













- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Swivel actions: double ball ring with grease lubrication
 - 5) King pin: integrated with the plate and cold-riveted
- Available with total front foot brake


																		
mm	mm	kg	CODE	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN				
40	18	0.12	374100	0.11	375100	0.15	378100	59	42x42	31x31	5	24	78	30				
50	18	0.20	374101	0.20	375101	0.24	378101	67	55x55	40x40	6	24	76	35				
60	24	0.28	374102	0.26	375102	0.40	378102	83	60x60	45x45	6	21	84	50				
75	24	0.40	374303	0.31	375303	0.48	378303	101	60x60	45x45	6	25	91	55				
80	24	0.43	374103	0.34	375103	0.50	378103	104	60x60	45x45	6	25	91	55				
100	24	0.48	374104	0.40	375104	0.57	378104	121	60x60	45x45	6	32	95	55				
125	30	0.87	374105	0.80	375105	0.97	378105	152	77x67	55x45	8	40	115	80				

Institutional brackets














- 1) Plate: electrolytically galvanised steel plate
- 2) Fork: electrolytically galvanised steel plate
- 3) Ball race ring: electrolytically galvanised steel plate
- 4) Swivel actions: double ball ring with grease lubrication
- 5) King pin: integrated with the plate and cold-riveted


		2 pc package											
										3 km/h			
mm	mm	kg	CODE	mm	mm	mm	mm	mm	daN				
50	18	0.39	374001	67	55x55	40x40	6	24	35				
60	24	0.68	374002	85	60x60	45x45	6	21	50				



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Swivel actions: double ball ring with grease lubrication
 - 5) King pin: integrated with the plate and cold-riveted
- Available with total front foot brake

											3 km/h		
mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	daN		
40	18	0.11	373100	0.14	377100	59	35	10	24	78	30		
50	18	0.16	373101	0.19	377101	66	35	10	24	76	35		
60	24	0.25	373102	0.32	377102	83	41	12	21	84	50		
75	24	0.31	373303	0.40	377303	101	41	12	25	91	55		
80	24	0.34	373103	0.43	377103	104	41	12	25	91	55		
100	24	0.40	373104	0.49	377104	121	41	12	32	91	55		
125	30	0.76	373105	0.87	377105	149	52	12	40	115	80		


Institutional brackets



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Galvanised steel threaded stem
 - 5) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

						2 pc package									
mm	mm	kg	CODE	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	mm	daN
40	18	0.13	376100	0.18	379100			59	35	M8	15	24	78	30	
50	18	0.18	376101	0.21	379101	0.34	376001	66	35	M8	15	24	76	35	
60	24	0.29	376102	0.36	379102	0.60	376002	83	41	M12	25	21	84	50	
75	24	0.36	376303	0.43	379303			101	41	M12	25	25	91	55	
80	24	0.39	376103	0.46	379103			104	41	M12	25	25	91	55	
100	24	0.44	376104	0.53	379104			121	41	M12	25	32	95	55	
125	30	0.79	376105	0.89	379105			149	35	M12	25	40	115	80	

Institutional twin brackets




- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Swivel actions: double ball ring with grease lubrication
 - 5) King pin: integrated with the plate and cold-riveted
- Available with total front foot brake














mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN	
50	18+18	0.35	374201	0.40	378201	70	60x60	45x45	6	30	82	60	
75	24+24	0.64	374203	0.72	378203	100	60x60	45x45	6	33	95	80	

GREY RUBBER WHEELS WITH POLYPROPYLENE CENTRE

Twin brackets for institutional




- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Galvanised steel threaded stem
 - 5) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

														
mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN		
50	18+18	0.30	376201	0.37	379201	70	42	M10	15	30	82	60		
75	24+24	0.50	376203	0.68	379203	100	52	M12	25	33	95	80		



Quality You need

BLACK THERMOPLASTIC RUBBER WHEELS WITH POLYPROPYLENE CENTRE



Description

Tyre: black thermoplastic rubber.

Centre: polypropylene.

Hub with plain bore hole which directly houses the axle.

Uses

Mainly suitable for static applications, on even flooring and for light carrying capacities.

Example of recommended applications: compressors, welding machines.

Environments of use

Suitable for industrial and institutional environments, also in presence of humidity. Not suitable in the presence of organic solvents, chlorinated substances, hydrocarbons and mineral oils.

WEAK ACIDS			
STRONG ACIDS			
WATER			
ALCOHOL			

WEAK BASES			
STRONG BASES			
HYDROCARBONS			
SOLVENTS			

For information on the compatibility of the component wheel materials with specific aggressive chemical substances, see table at page 36.








Floors

Suitable on tiles and resin-cement; not recommended on abrasive, unpaved floors or in presence of processing residues.


Not suitable for uneven surfaces.















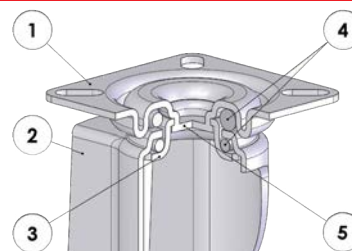

														
mm	mm	kg	CODE	mm	mm	daN								
80	26	0.09	511101	10	34	30								
100	30	0.11	511112	8	35	35								
100	30	0.11	511122	12	35	35								
125	35	0.18	511103	15	44	50								
150	35	0.23	511104	15	44	90								
175	45	0.33	511105	20	59	100								
200	50	0.72	511106	20	59	120								
250	50	0.89	511108	20	59	120								

Institutional brackets




- 1) Plate: electrolytically galvanised steel plate
- 2) Fork: electrolytically galvanised steel plate
- 3) Ball race ring: electrolytically galvanised steel plate
- 4) Swivel actions: double ball ring with grease lubrication
- 5) King pin: integrated with the plate and cold-riveted











														
mm	mm	kg	CODE	mm	mm	mm	mm	mm	daN					
80	26	0.43	514411 	106	60x60	45x45	6	28	30					
100	30	0.48	514412 	128	60x60	45x45	6	32	35					

BLACK THERMOPLASTIC RUBBER WHEELS WITH POLYPROPYLENE CENTRE


Institutional brackets














- 1) Plate: electrolytically galvanised steel plate
- 2) Fork: electrolytically galvanised steel plate
- 3) Ball race ring: electrolytically galvanised steel plate
- 4) Galvanised steel threaded stem
- 5) Swivel actions: double ball ring with grease lubrication

														
mm	mm	kg	CODE	mm	mm	mm	mm	mm	daN					
80	26	0.35	516801	103	41	M12	25	28	30					
100	30	0.40	516802	126	41	M12	25	32	35					

Standard-duty brackets NL - max carrying capacity 90 daN



- 1) Plate: electrolytically galvanised steel plate
- 2) Fork: electrolytically galvanised steel plate
- 3) Ball race ring: electrolytically galvanised steel plate
- 4) Dust seal: orange polyethylene
- 5) Swivel actions: double ball ring with grease lubrication
- 6) King pin: integrated with the plate and cold-riveted

														
mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	kg			
80	26	0.62	514401	0.34	515701	107	100x85	80x60	9	37	30			
100	30	0.63	514402	0.37	515702	128	100x85	80x60	9	35	35			
125	35	0.82	514403	0.48	515703	156	100x85	80x60	9	37	50			
150	35	0.91	514404	0.54	515704	182	100x85	80x60	9	42	90			